RNAV (RNP) Z RWY 34L

SEATTLE-TACOMA INTL (SEA)


APP CRS	Rwy Ldg	8500
344°	TDZE	379
	Apt Elev	433


For uncompensated Baro-VNAV systems, procedure NA below -6°C (22°F) or above 54°C (130°F). Simultaneous approach authorized with Rwy 34R except for arrivals at SHIPZ. GPS required. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For inop ALS, increase RNP 0.15 all Cats visibility to RVR 5000 and RNP 0.30 all Cats visibility to 1⅜ mile.


MALSR

MISSED APPROACH: Climb to 900 then climbing left turn to 5000 direct LOFAL and hold.

D-ATIS	SEATTLE APP CON	SEATTLE TOWER	GND CON
118.0	133.65 273.45	119.9 239.3 (16L, 16C, 34C, 34R) 120.95 239.3 (16R, 34L)	121.7

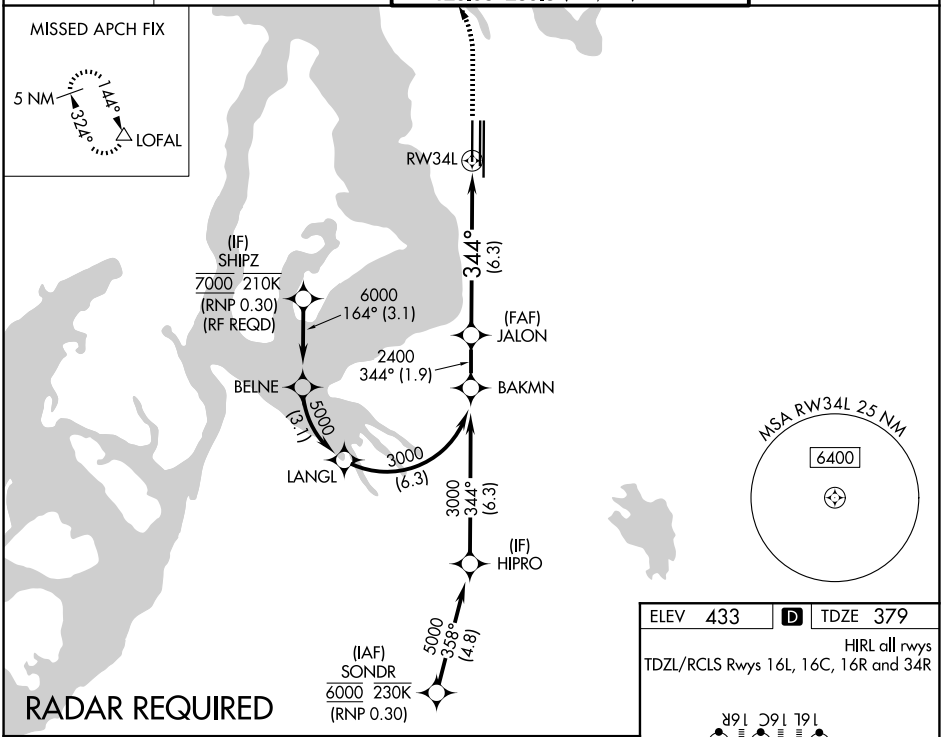

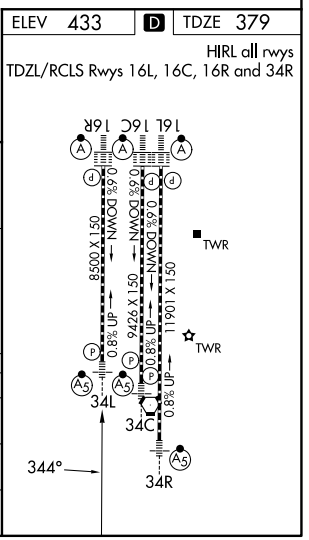

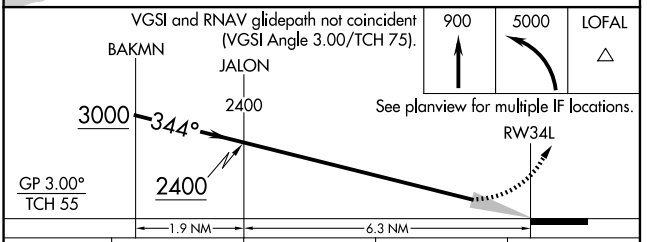

CATEGORY	A	B	C	D
RNP 0.15 DA	695/24 316 (300-½)		695/40 316 (300-¾)	
RNP 0.30 DA	787/50 408 (400-1)			

AUTHORIZATION REQUIRED

NW-1, 29 OCT 2026 to 26 NOV 2026
NW-1, 29 OCT 2026 to 26 NOV 2026