LOC/DME I-IUM	APP CRS	Rwy Ldg	8950
110.5	042°	TDZE	8
Chan 42		Apt Elev	13

ILS Z RWY 4R

DANIEL K INOUYE INTL (HNL) (PHNL)


From HAURY: RNAV 1-GPS required. DME or RADAR required. DME or RADAR required for procedure entry.

HAURY transition NA for Cat E aircraft. For inop ALS, increase S-ILS 4R Cats A-D visibility to ⅞ SM, increase S-ILS 4R Cat E visibility to 1⅝ SM.


MALSR


MISSED APPROACH: Climb to 540, Cat E climb to 780 then climbing right turn to 3000 on heading 220° and on HNL VORTAC R-171 to ALANA INT/HNL VORTAC 13.9 DME and hold. *Missed approach requires minimum climb of 318 feet per NM to 1820, (if unable to meet climb gradient use S-ILS 4R minimums).

D-ATIS	HCF APPROACH	HONOLULU TOWER	GND CON
127.9 251.15	118.3 269.0	118.1 257.8 123.9 273.575 (8R/26L)	121.9 348.6

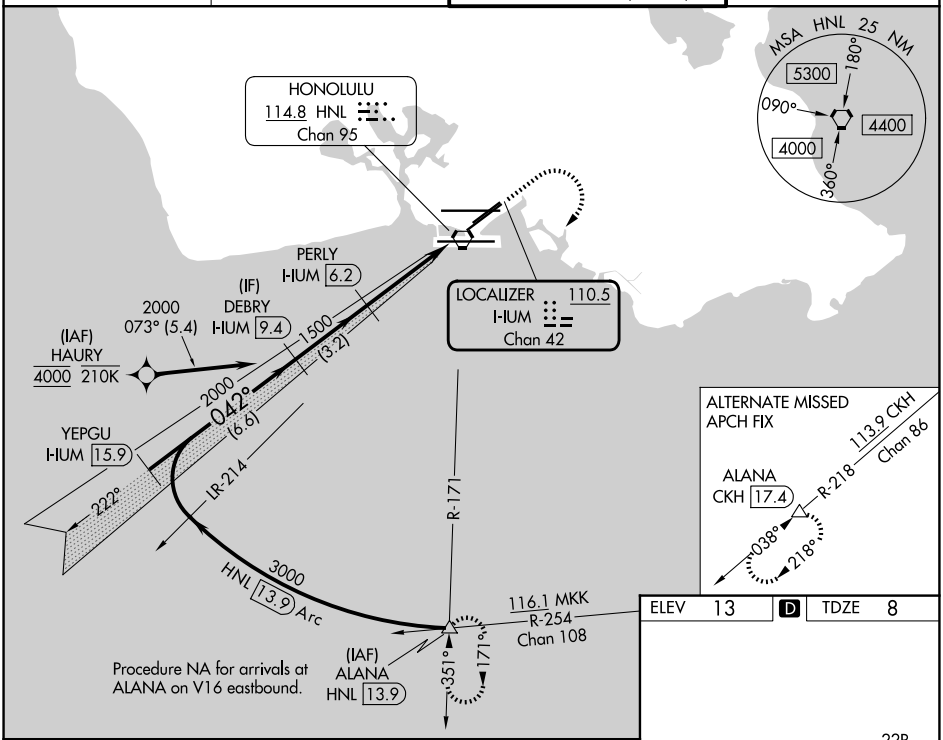

ELEV 13 D TDZE 8

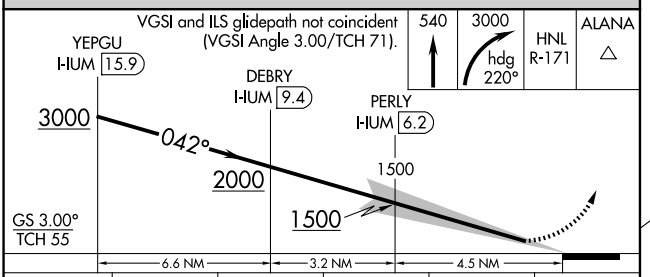



CATEGORY	A	B	C	D	E
S-ILS 4R*	258-½	250 (300-½)			NA
S-ILS 4R	308-½	299 (300-½)			566-1⅛ 557 (600-1⅛)

MIRL Rwy 4L-22R
REIL Rwys 4L, 8R, 22L, 22R, and 26R
HIRL Rwys 4R-22L, 8L-26R, and 8R-26L

PAC, 29 OCT 2026 to 24 DEC 2026
PAC, 29 OCT 2026 to 24 DEC 2026