APP CRS	Rwy Ldg	11830
259°	TDZE	10
	Apt Elev	13

RNAV (RNP) RWY 26L

DANIEL K INOUYE INTL (HNL) (PHNL)


RNP AR APCH, RF required.

NA For uncompensated Baro-VNAV systems, procedure NA below 15°C (58°F) or above 53°C (128°F).


MALSF

MISSED APPROACH: Climb to 3000 on track 259° to KABTE, left turn to LAYIG, then track 133° to ALANA and hold. Missed approach requires minimum climb of 234 feet per NM to 300.

D-ATIS	HCF APPROACH	HONOLULU TOWER	GND CON
127.9 251.15	118.3 269.0	118.1 257.8 123.9 273.575 (8R/26L)	121.9 348.6

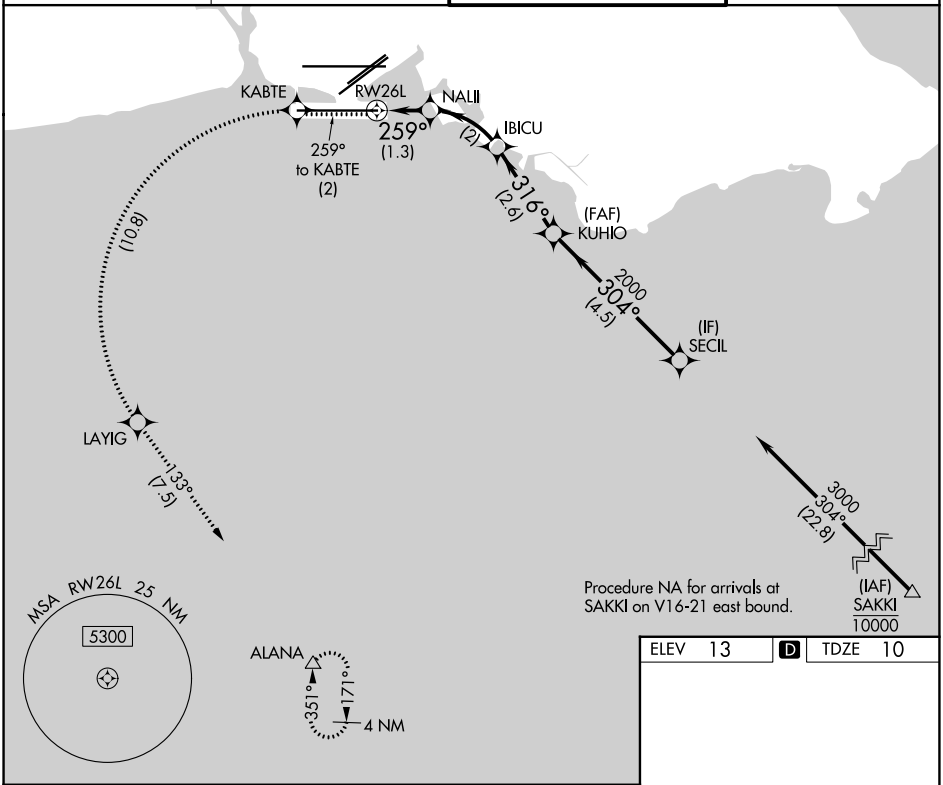


ELEV 13 D TDZ 10

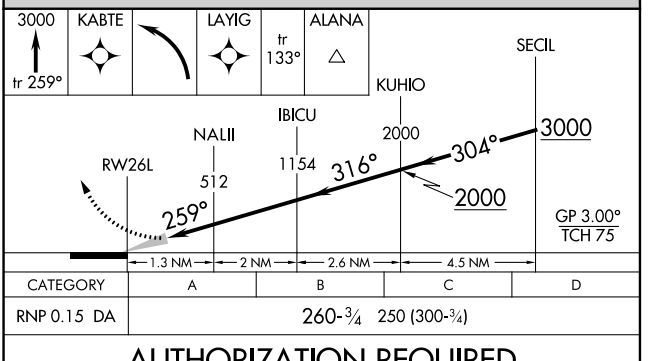

CATEGORY	A	B	C	D
RNP 0.15 DA	260-¾ 250 (300-¾)			

AUTHORIZATION REQUIRED



MIRL Rwy 4L-22R
REIL Rwys 4L, 8R, 22L, 22R, and 26R
HIRL Rwys 4R-22L, 8L-26R, and 8R-26L

PAC, 29 OCT 2026 to 24 DEC 2026
PAC, 29 OCT 2026 to 24 DEC 2026