

WAAS CH 81921 W09A	APP CRS 089°	Rwy Ldg TDZE 795 Apt Elev 819
--	------------------------	---

RNAV (GPS) RWY 9

RIVERSIDE (RAL)


⚠

⚠


DME/DME RNP-0.3 NA. When local altimeter setting not received, use Chino altimeter setting and increase all DA 46 feet and all MDA 60 feet and increase LPV all Cats and Circling Cats C and D visibility ¼ mile and LNAV/VNAV all Cats and LNAV Cats C and D visibility ½ mile. VDP and Baro-VNAV NA with Chino altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). Circling NA for Cat D north of Rwy 9-27.

MISSED APPROACH:
Climb to 6000 direct JIKUB and on track 121° to HDF VOR and hold, continue climb-in-hold to 6000.

ATIS 128.8	SOCAL APP CON 135.4 377.125	RIVERSIDE TOWER ★ 121.0 (CTAF) 0 257.8	GND CON 124.125	UNICOM 122.95
----------------------	---------------------------------------	---	---------------------------	-------------------------

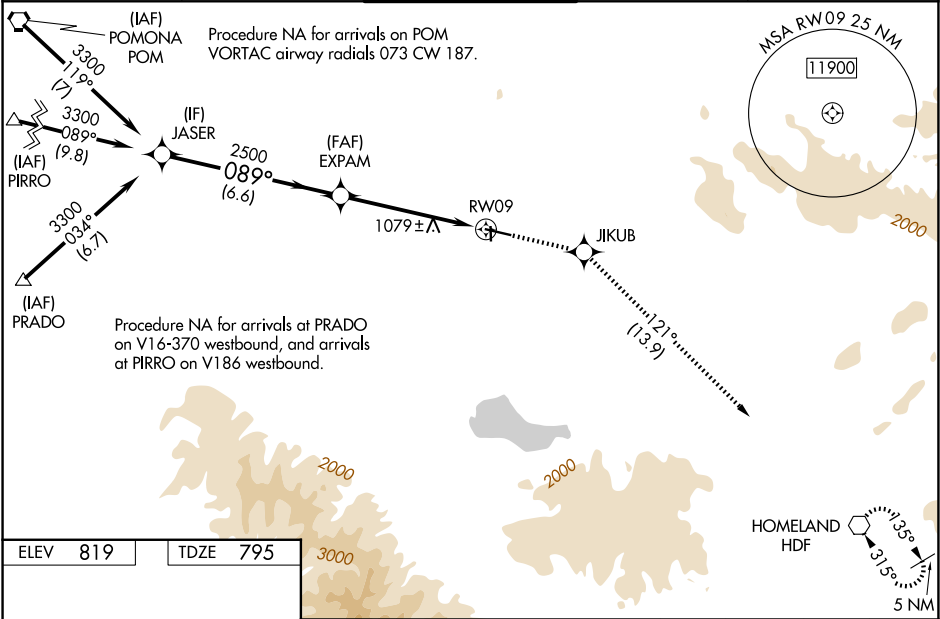

ELEV 819	TDZE 795
----------	----------



	JASER	EXPAM	JIKUB	HDF
	3300	2500	6000	tr 121°
	089°	2500	*1.7 NM to RW09	*LNAV only
	GP 3.00° TCH 41	6.6 NM	3.6 NM	1.7 NM
CATEGORY	A	B	C	D
LPV DA	1127-1½		332 (400-1½)	
LNAV/VNAV DA	1461-2½		666 (700-2½)	
LNAV MDA	1340-1	545 (600-1)	1340-1½	545 (600-1½)
CIRCLING	1340-1 521 (600-1)	1680-1¼ 861 (900-1¼)	1800-3 981 (1000-3)	1960-3 1141 (1200-3)

MIRL Rwy 9-27 and 16-34