| WAAS CH 40243 W05B | APP CRS 049° | Rwy Ldg 7100<br>TDZE 2567<br>Apt Elev 2567 |
|---|---|---|

# RNAV (GPS) RWY 5

## PULLMAN/MOSCOW RGNL (PUW)

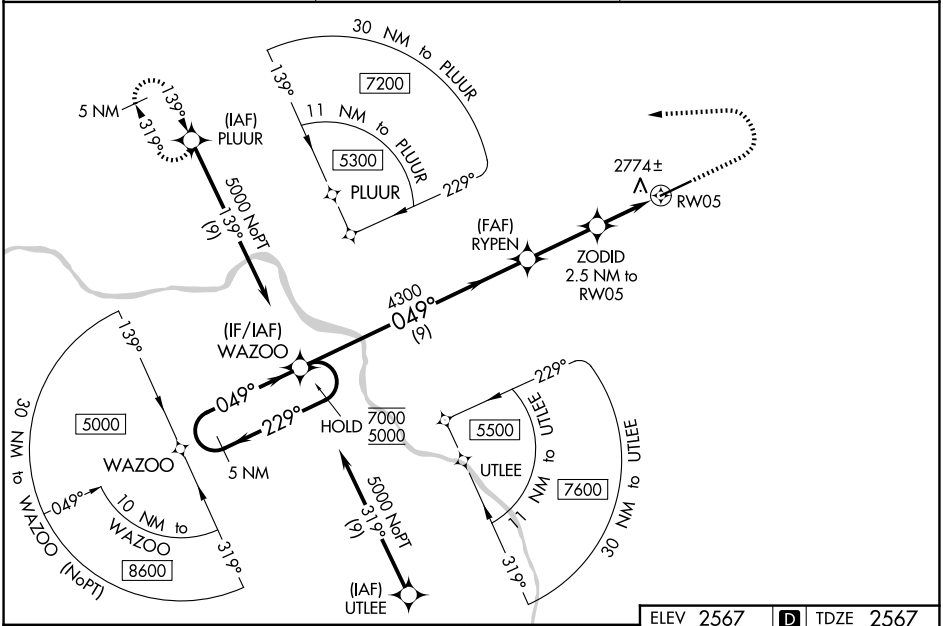
RNP APCH.

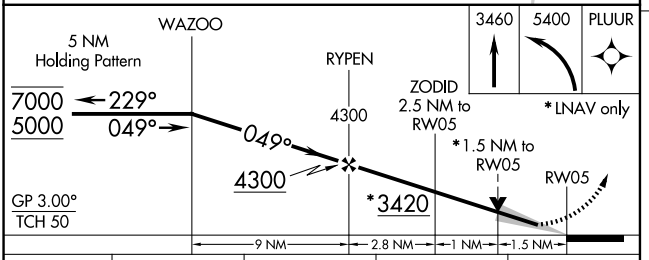
T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20° C or above 54° C. For inop ALS, increase LPV all Cats visibility to RVR 4500 and LNAV Cat C/D visibility to 1⅜ SM.
†RVR 1800 authorized with use of FD or AP or HUD to DA.


MALSR

MISSED APPROACH: Climb to 3460 then climbing left turn to 5400 direct PLUUR and hold.
#Missed approach requires minimum climb of 250 feet per NM to 4800.

| ASOS | SEATTLE CENTER | UNICOM |
|---|---|---|
| 135.675 | 123.95 290.55 | 122.8 (CTAF) L |




| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA#† | 2767/24 200 (200-½) | | | |
| LPV DA | 2846/24 279 (300-½) | | | |
| LNAV/VNAV DA | 3005/40 438 (500-¾) | | | |
| LNAV MDA | 3080/24 513 (600-½) | | 3080/55 513 (600-1) | |
| CIRCLING | 3080-1 513 (600-1) | 3120-1 553 (600-1) | 3140-1½ 573 (600-1½) | 3420-2¾ 853 (900-2¾) |

REIL Rwy 23 L
HIRL Rwy 5-23 L



NW-1, 29 OCT 2026 to 26 NOV 2026
NW-1, 29 OCT 2026 to 26 NOV 2026