

HI-TACAN Z RWY 24R

TACAN NKX Chan 33	APCH CRS 247°	Rwy Idg 24R 12,000	24L 475	8001 477
		TDZE 24R 477	24L 477	
		Arpt Elev 477		

[USN]
MIRAMAR MCAS (JOE FOSS FLD) (KNKX)

⚠ *When ALS inop, increase CAT CDE vis to 1½ miles.
** CAT E circling not authorized S of Rwy 6R-24L.


ALSF-1

MISSED APPROACH: Climb to 1500, then climbing right turn to 7000 via NKX TACAN R-003 to HUKVO. Arc NE of NKX via 16 mile arc to WARNT and hold. Cross R-323 at 3000 mandatory, cross HUKVO at 6000 mandatory.

ATIS ★ 133.475 352.0	SOCAL APP CON 132.2 269.1	FOSS TOWER ★ 135.2 298.925 0	GND CON 128.625 307.325	LA CENTER 291.7	ASR/ PAR
----------------------	---------------------------	------------------------------	-------------------------	-----------------	----------

Knots	60	120	180	240	300	360
V/V(fpm)	275	550	825	1100	1375	1650


ATC climb of 275 ft/NM to 6000

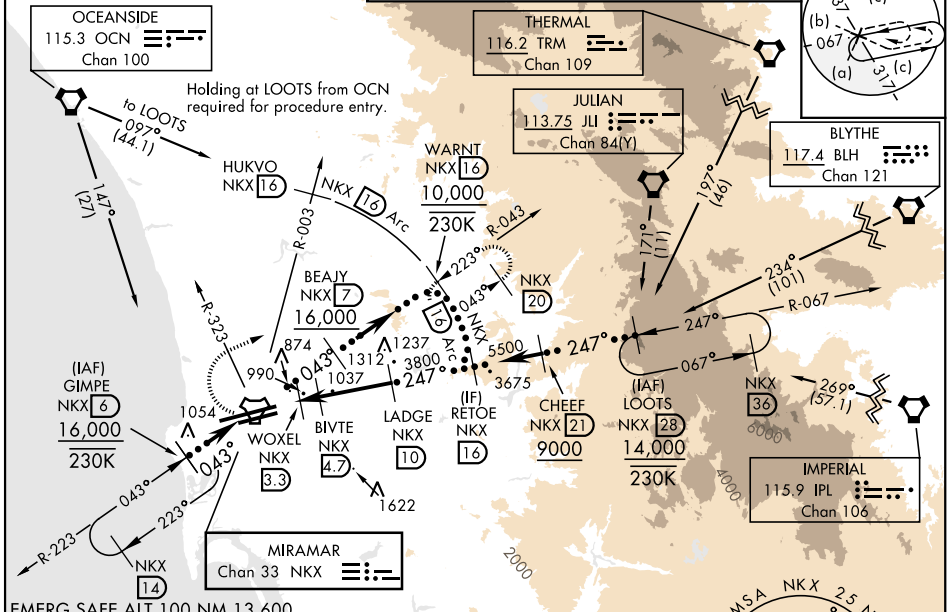


EMERG SAFE ALT 100 NM 13,600

1500
↑
cross NKX R-323 3000
7000
cross NKX R-003
HUKVO NKX 16 6000


VGSI and descent angles not coincident.

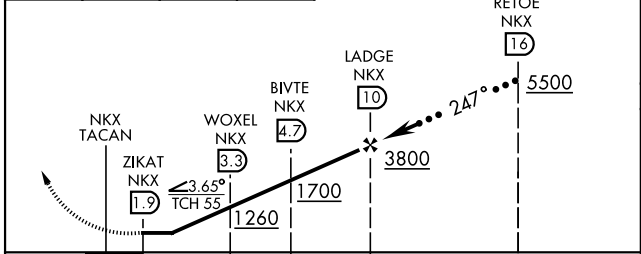

CATEGORY	C	D	E
S-24R *	1140-1½	665 (700-1½)	
SIDESTEP 24L	1140-1⅞ 663 (700-1⅞)	1140-2 663 (700-2)	1140-2¼ 663 (700-2¼)
CIRCLING **	1140-1⅞ 663 (700-1⅞)	1180-2¼ 703 (800-2¼)	1360-3 883 (900-3)



ELEV 477	TDZE 24R 475
	TDZE 24L 477



HI-TACAN Z RWY 24R