

ILS or LOC RWY 21

LOC/DME I-RRG 109.3 Chan 30	APCH CRS 212°	Rwy Idg 11,102 TDZE 13 Arpt Elev 13
---	-------------------------	--

[USN] POINT MUGU NAS (NAVAL BASE VENTURA CO) (KNTD)

DME or RADAR required

▼ *When ALS inop, increase vis to ¾ mile.
**When ALS inop, increase CAT AB vis to 1 mile,
CAT CDE vis to 1½ miles.
***Circling not authorized SE of Rwy 3-21.

MALSR


MISSED APPROACH: Climb to 2600 on
NTD TACAN R-211 to HALTU and hold.

ATIS ★ 125.55 363.05	APP CON ★ 128.65 307.275	TOWER ★ 124.85 290.375	GND CON 121.6 360.2	ASR/PAR
--------------------------------	------------------------------------	----------------------------------	-------------------------------	---------


ILS localizer not useable beyond 27° left of cntrln.

ILS glideslope not useable beyond 7° left of cntrln.

Circling: CAT A remain within 1.3 NM, CAT B remain within 1.5NM,
CAT C remain within 1.7 NM, CAT D remain within 2.3 NM.

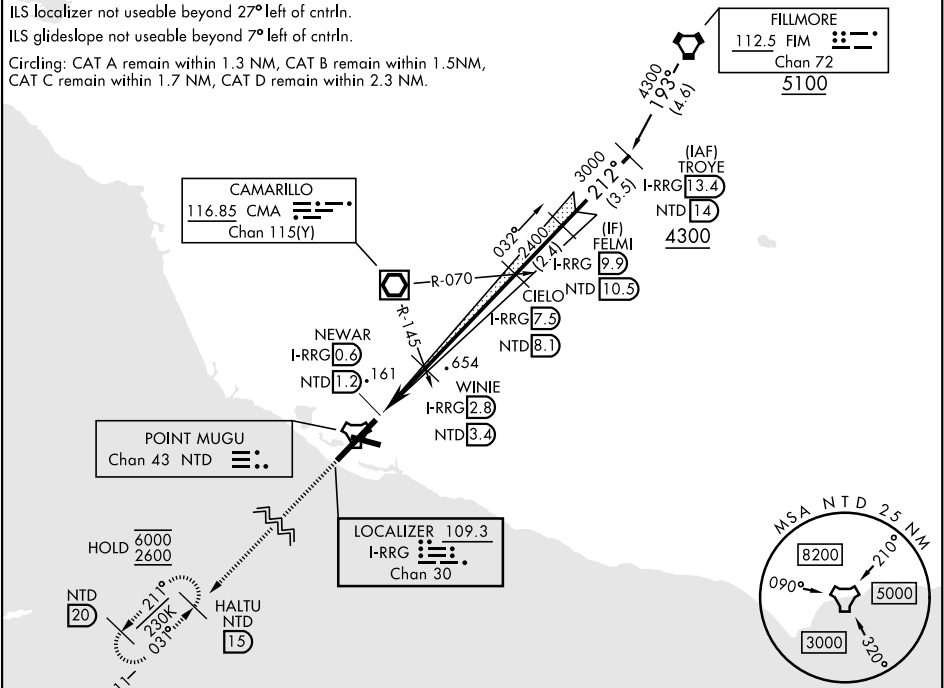

EMERG SAFE ALT 100 NM 12,300

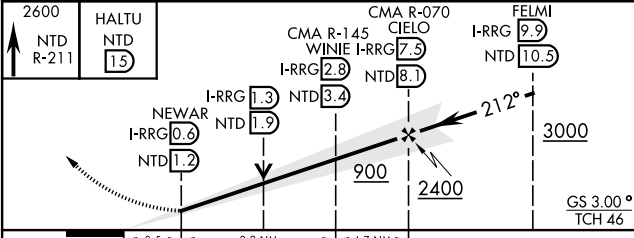

CATEGORY	A	B	C	D	E
S-ILS 21 *	213 - ½		200 (200-½)		
S-LOC 21 **	420 - ½	407 (500-½)	420-¾	407 (500-¾)	
CIRCLING***	420-1 407 (500-1)	520-1 507 (600-1)	520-1½ 507 (600-1½)	580-2 567 (600-2)	NOT AUTHORIZED

ELEV 13 | TDZE 13

The diagram shows the approach path with altitudes and distances. Key features include:

- Altitudes:** 2120, 1610, 109.3, 109.3, 109.3.
- Distances:** 1.2 NM, 1.2 NM, 1.2 NM.
- Obstacles:** TROYE (13.4), CIELO (10.5), WINIE (2.8), NEWAR (0.6).

HIRL all rwy's

ILS or LOC RWY 21

SW-3, 29 OCT 2026 to 26 NOV 2026

SW-3, 29 OCT 2026 to 26 NOV 2026