WAAS CH 93702 W06A	APP CRS 057°	Rwy Ldg 7201 TDZE 2351 Apt Elev 2351

RNAV (GPS) RWY 6


GENERAL WM J FOX AIRFIELD (WJF)


RNP APCH - GPS.

T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Baro-VNAV and VDP NA when using PMD altimeter setting. When local altimeter setting not received, use PMD altimeter setting and increase LPV DA to 2646 feet, increase LNAV/VNAV DA to 2694 feet, increase all MDAs 60 feet, and LNAV visibility Cat C/D ⅛ SM, and Circling visibility Cat C/D ¼ SM.


MISSED APPROACH: Climb to 6000 direct SISOY and on track 091° to ETHER and hold.

ATIS	JOSHUA APP CON	FOX TOWER★	GND CON	UNICOM
126.3	126.1 290.3	118.525 (CTAF) 256.9	121.7 256.9	122.95

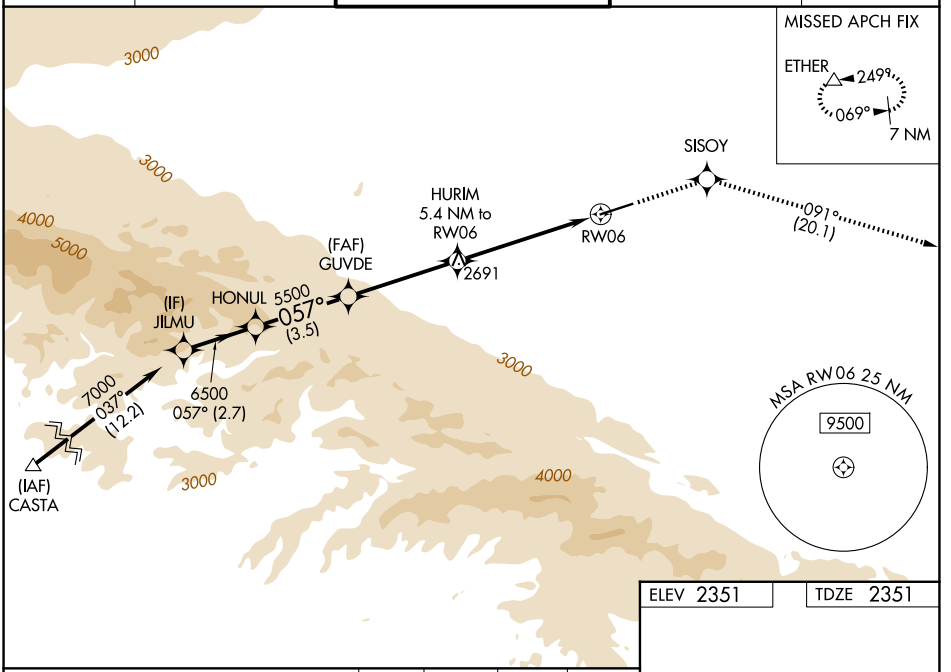

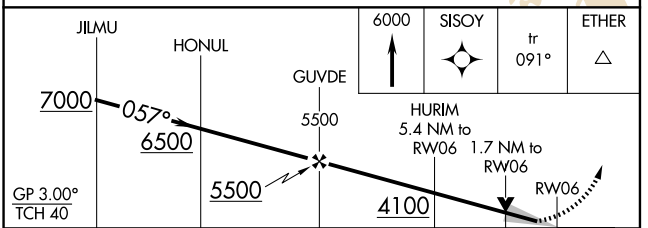

ELEV 2351 TDZE 2351



CATEGORY	A	B	C	D
LPV DA	2601-1 250 (300-1)			
LNAV/VNAV DA	2649-1 298 (300-1)			
LNAV MDA	2940-1 589 (600-1)		2940-1¾ 589 (600-1¾)	
CIRCLING	2940-1 589 (600-1)		3120-2¼ 769 (800-2¼)	3120-2½ 769 (800-2½)

REIL Rwys 6 and 24
MIRL Rwy 6-24

SW-3, 29 OCT 2026 to 26 NOV 2026
SW-3, 29 OCT 2026 to 26 NOV 2026