LOC/DME I-GSP	APP CRS	Rwy Ldg 11001
109.3	038°	TDZE 947
Chan 30		Apt Elev 964

ILS or LOC RWY 4

GREENVILLE SPARTANBURG INTL (GSP)


DME required.

For inop ALS, increase S-LOC 4 Cats C and D visibility to RVR 5500. When local altimeter setting not received, use Greenville Downtown altimeter setting: increase DA to 1176 feet; increase all MDAs 40 feet and visibility S-LOC 4 Cat C/D to RVR 4000 and Circling Cat D ½ SM. For inop ALS, when using Greenville Downtown altimeter setting, increase S-LOC 4 Cats C/D visibility to RVR 6000.

ALSF-2

MISSED APPROACH: Climb to 3000 then right turn direct SPA VORTAC and hold.

ATIS	GREER APP CON★	GREER TOWER★	GND CON	UNICOM
134.25	118.8 270.275	120.1 (CTAF) L 251.15	121.9	122.95

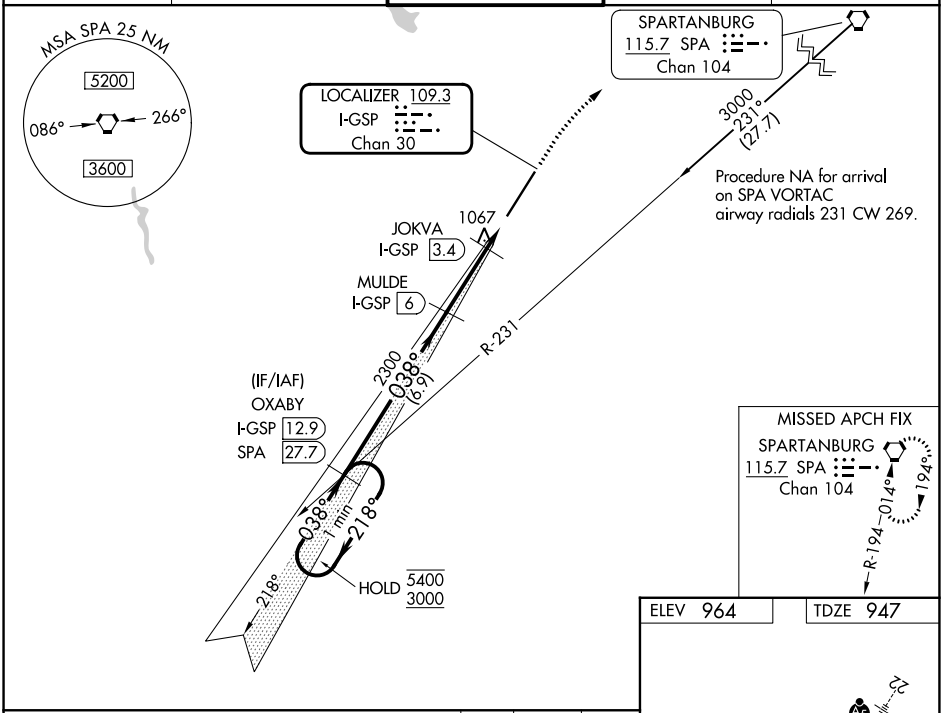

CATEGORY	A	B	C	D
S-ILS 4	1147/18 200 (200-½)			
S-LOC 4	1320/24 373 (400-½)		1320/35 373 (400-⅝)	
CIRCLING	1440-1 476 (500-1)		1480-1½ 516 (600-1½)	1700-2¼ 736 (800-2¼)

SE-2, 29 OCT 2026 to 26 NOV 2026
SE-2, 29 OCT 2026 to 26 NOV 2026