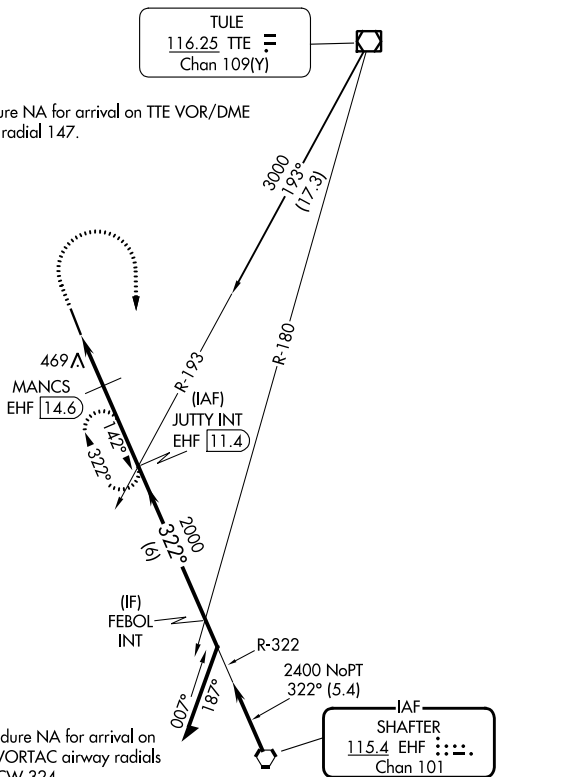


VOR RWY 33
DELANO MUNI (DLO)

MISSED APPROACH: Climb to 1200 then climbing right turn to 2400 on EHF VORTAC R-322 to JUTTY INT/EHF 11.4 DME and hold, continue climb-in-hold to 2400.

UNICOM
122.8 (CTAF) **L**

Procedure NA for arrival on
EHF VORTAC airway radials
269 CW 324.

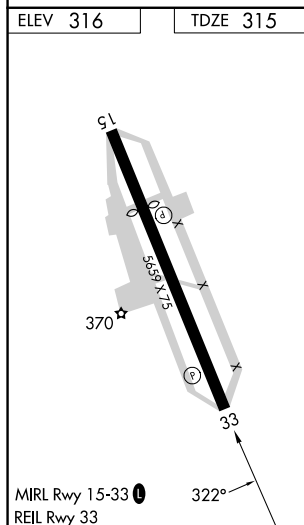


Diagram illustrating a circling approach for a Category C aircraft. The diagram shows a 1200m high obstacle, a 2400m obstacle with EHF R-322, and a JUTTY INT. The approach path starts at a 1000m altitude, turns right at a 3.00° angle (TCH 40°) to a 2000m altitude, then turns right again at a 322° angle to a 2400m altitude. The final segment is a 142° turn to a 2400m altitude. The diagram also shows a 2400m obstacle with EHF R-322, a JUTTY INT, and a FEBOL INT. The diagram includes a table with the following data:

CATEGORY	A	B	C	D
S-33	860-1	545 (600-1)	860-1 5/8	545 (600-1 5/8)
CIRCLING	860-1	544 (600-1)	860-1 5/8 544 (600-1 5/8)	960-2 644 (700-2)