YUMA, ARIZONA

VOR RWY 6

VORTAC BZA	APCH CRS	Rwy Idg	6043
116.8	048°	TDZE	387
Chan 115		Arpt Elev	433

[USA] LAGUNA AAF (YUMA PROVING GROUND) (KLGF)

RADAR required for holding.

T
A NA

* Procedure not authorized at night.
** Circling not authorized NW of rwys 06 and 18.

MISSED APPROACH: Climbing right turn to 3800 direct BZA VORTAC and hold, continue climb-in-hold to 3800.


ATIS	YUMA APP CON	TOWER ★	GND CON
128.225	124.7 371.975	126.2 (CTAF) 242.175	121.8 L 229.4


Helicopter visibility reduction not authorized.


Procedure not authorized when airfield closed.

Unlit road 379′ MSL, 314′ from threshold.


Obtain local altimeter setting on CTAF.
When not received, use Yuma MCAS Intl altimeter setting.

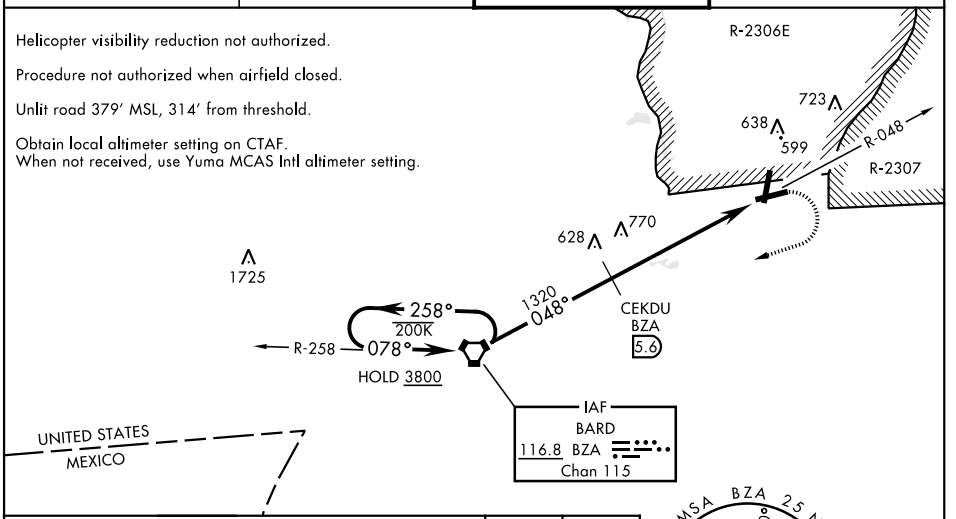

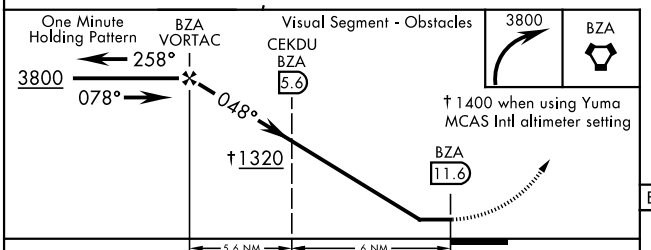



ELEV 433	TDZE 387



MIRL Rwy 18-36 L

CATEGORY	A	B	C	D
S-6*	1320-1¼ 933 (900-1¼)		1320-2½ 933 (900-2½)	
CIRCLING**	1320-1¼ 887 (900-1¼)		1320-2¾ 887 (900-2¾)	1320-3 887 (900-3)
DME MINIMA				
S-6*	1040-1 653 (700-1)		1040-1⅞ 653 (700-1⅞)	
CIRCLING**	1080-1 647 (700-1)		1080-1⅞ 647 (700-1⅞)	1080-2 647 (700-2)
YUMA MCAS/YUMA Intl ALTIMETER SETTING				
S-6*	1400-1¼ 1013 (1000-1¼)	1400-1½ 1013 (1000-1½)	1400-3 1013 (1000-3)	
CIRCLING**	1400-1¼ 967 (1000-1¼)	1400-1½ 967 (1000-1½)	1400-3 967 (1000-3)	
YUMA MCAS/YUMA Intl ALTIMETER SETTING DME MINIMA				
S-6*	1120-1 733 (700-1)		1120-2 733 (700-2)	
CIRCLING**	1160-1 727 (800-1)		1160-2 727 (800-2)	1160-2¼ 727 (800-2¼)

FAF to MAP 11.6 NM					
Knots	60	90	120	150	180
Min:Sec	11:36	7:44	5:48	4:38	3:52

SW-4, 29 OCT 2026 to 26 NOV 2026