APP CRS	Rwy Ldg	7591
275°	TDZE	17
	Apt Elev	17

RNAV (RNP) Z RWY 27

SAN DIEGO INTL (SAN)


RNP AR APCH - GPS. Authorization required. From KLOMN: RF.

For uncompensated Baro-VNAV systems, procedure NA below 5°C or above 44°C. For inop ALS, increase RNP 0.30 all Cats visibility to 2½ SM. Straight-in Rwy 27 at night, operational VGSI required, remain on or above VGSI glidepath until threshold.


MALS

MISSED APPROACH: Climb to 2500 on track 275° to SARGS and hold.


D-ATIS	SOCAL APP CON	LINDBERGH TOWER	GND CON
134.8	119.6 363.1 (W) 124.35 279.625 (E)	118.3 338.225	123.9

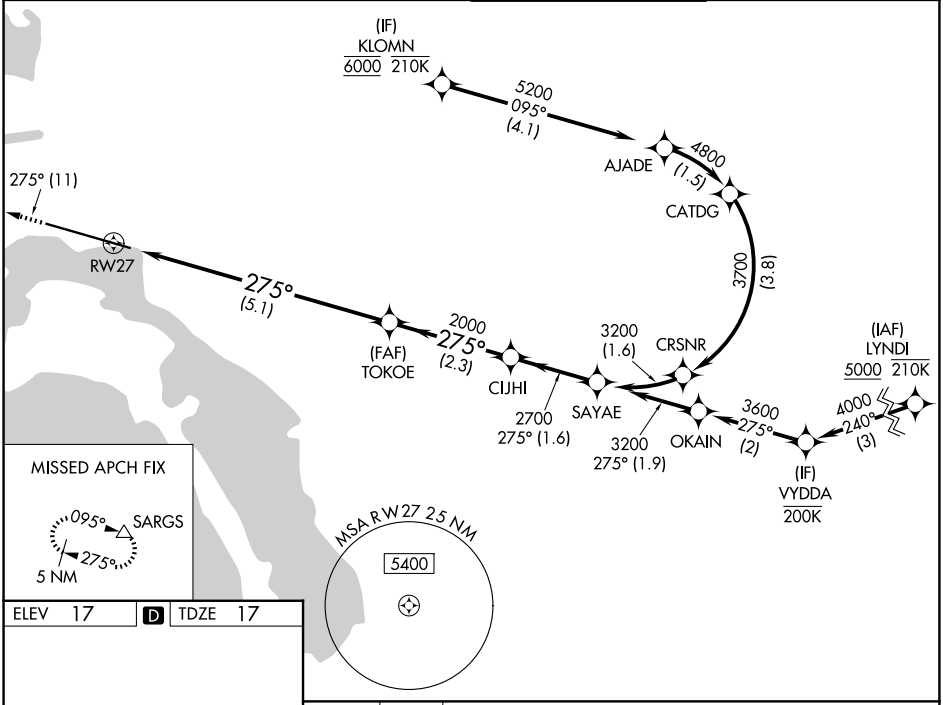

ELEV 17 | D | TDZE 17



TDZL/RCLS Rwys 9 and 27
HIRL Rwy 9-27

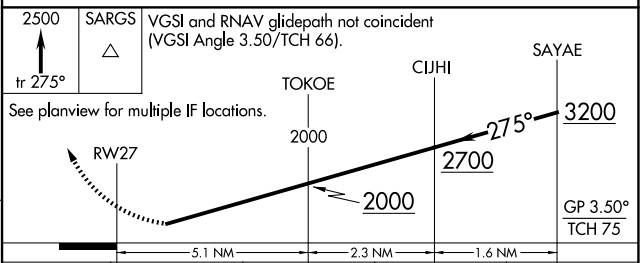

CATEGORY	A	B	C	D
RNP 0.11 DA	624-1½ 607 (700-1½)			
RNP 0.30 DA	789-2 772 (800-2)			

AUTHORIZATION REQUIRED

SW-3, 26 NOV 2026 to 24 DEC 2026
SW-3, 26 NOV 2026 to 24 DEC 2026