HAWWC THREE DEPARTURE (RNAV)

(HAWWC3.HAWWC) 19JUL18

SANTA ANA, CALIFORNIA

JOHN WAYNE/ORANGE COUNTY (SNA)

(HAWWC3.HAWWC) 22251

HAWWC THREE DEPARTURE (RNAV)

AL-377 (FAA)


JOHN WAYNE/ORANGE COUNTY (SNA)


SANTA ANA, CALIFORNIA

TOP ALTITUDE: 6000

NOTE: RADAR required.
NOTE: RNAV 1.
NOTE: DME/DME/IRU or GPS required.
NOTE: This procedure not authorized for turbojet aircraft.

D-ATIS 126.0
CLNC DEL 118.0
CPDLC
GND CON 120.8
JOHN WAYNE TOWER★ 126.8 343.625
SOCAL DEP CON 125.35 316.125

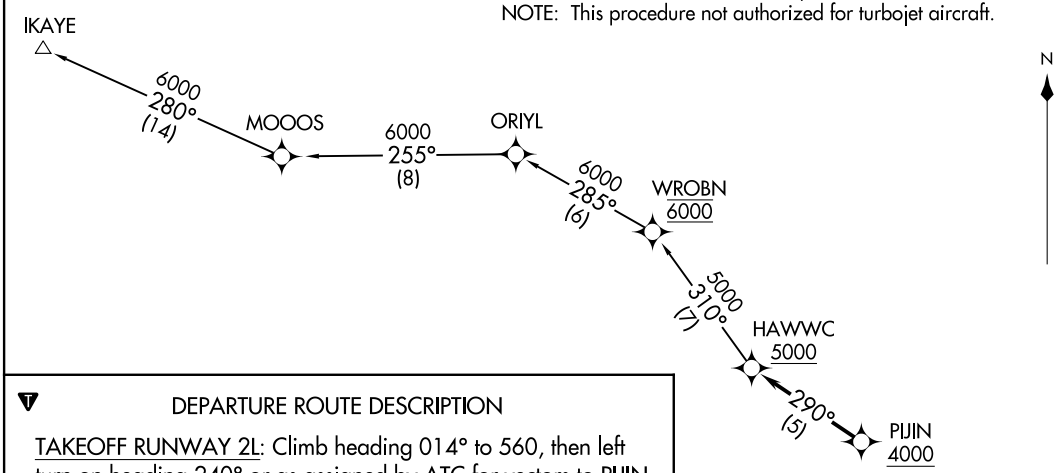

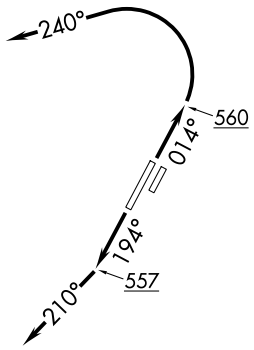

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 2L: Climb heading 014° to 560, then left turn on heading 240° or as assigned by ATC for vectors to PIJIN, cross PIJIN at or above 4000, then on track 290° to cross HAWWC at or above 5000, thence . . . .

TAKEOFF RUNWAY 20R: Climb heading 194° to 557, then on heading 210° or as assigned by ATC for vectors to PIJIN, cross PIJIN at or above 4000, then on track 290° to cross HAWWC at or above 5000, thence . . . .

. . . . on (transition). Maintain 6000. Expect higher altitude 10 minutes after departure.

IKAYE TRANSITION (HAWWC3.IKAYE)

TAKEOFF MINIMUMS
Rwys 2R, 20L: NA-ATC.
Rwy 2L: Standard.
Rwy 20R: Standard with minimum climb of 270′ per NM to 1300.

NOTE: Chart not to scale.