WAAS	APP CRS	Rwy Ldg	5700
CH 99502	196°	TDZE	54
W20A		Apt Elev	56

RNAV (GPS) Y RWY 20R
JOHN WAYNE/ORANGE COUNTY (SNA)


RNP APCH - GPS. RADAR required.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 5°C or above 54°C. Circling Rwy 20L NA at night. For inop ALS increase LNAV/VNAV visibility to 1⅜ SM.
*RVR 1800 authorized with use of FD or AP or HUD to DA.


MALSR

MISSED APPROACH: Climb to 3000 direct MINOE.

D-ATIS	SOCAL APP CON	JOHN WAYNE TOWER*	GND CON	UNICOM
126.0	121.3 263.1	126.8 (CTAF) L 343.625	120.8	122.95

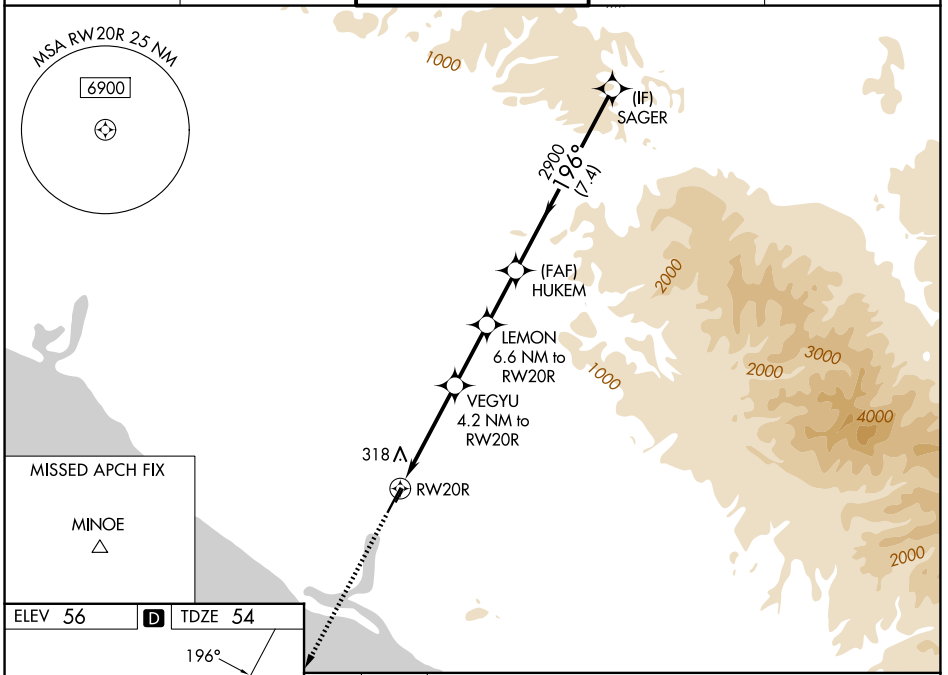

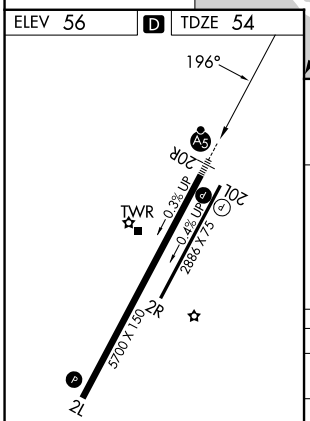

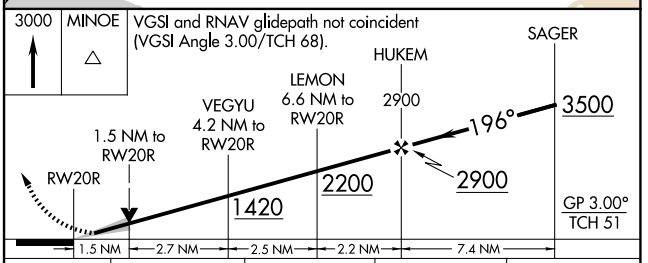

CATEGORY	A	B	C	D
LPV DA*	255/24 201 (200-½)			
LNAV/VNAV DA	516/50 462 (500-1)			
LNAV MDA	580/24 526 (600-½)		580/55 526 (600-1)	
CIRCLING	640-1 584 (600-1)		840-2¼ 784 (800-2¼)	1180-3 1124 (1200-3)

REIL Rwy 20L
MIRL Rwy 2R-20L
HIRL Rwy 2L-20R

SW-3, 26 NOV 2026 to 24 DEC 2026
SW-3, 26 NOV 2026 to 24 DEC 2026