EL CENTRO, CALIFORNIA

RNAV (GPS) RWY 8

WAAS CH 89932 W08A	APCH CRS 079°	Rwy ldg 9503 TDZE -46 Arpt Elev -42

(USN) EL CENTRO NAF (VRACIU FLD) (KNJK)

RNP APCH-GPS

When tower closed, increase visibility to 1 mile.

MISSED APPROACH: Climb to 800, then climbing right turn to 2400 direct BEENY and hold.

ATIS★	APP CON/DEP CON	TOWER★	GND CON
269.275	132.275 292.2	119.1 360.2	121.9 254.35

Circling to Rwy 30 NA at night.

For uncompensated Baro-VNAV systems, LNAV/VNAV not authorized below -14°C. (7°F) or above 54°C. (129°F).

MSA RW08 25 NM
6800

(IF) HOPSE 3600 2300
DRESR 2200
(FAF) BONII
RW08
IMPERIAL CO
4 NM
077°
230K
257°
BEENY
HOLD 4000 2400
JADOL
2300
062°
(3.6)
2200
079°
(2)
1600
(3)
138
3500
049°
(5.9)
(IAF) KUMBA 4000
1000
3000
UNITED STATES
MEXICO

EMERG SAFE ALT 100 NM 17,000

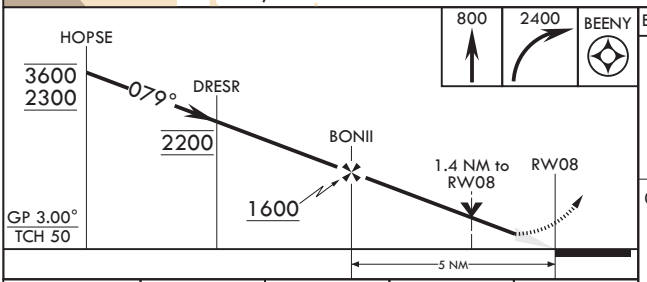

ELEV -42 TDZE -46



CATEGORY	A	B	C	D
LPV DA	204-¾	250	(300-¾)	
LNAV/VNAV DA	204-¾ 250 (300-¾)	236-⅞ 282 (300-⅞)	250-⅞ 296 (300-⅞)	269-⅞ 315 (400-⅞)
LNAV MDA	460-1	506 (600-1)	460-1⅜	506 (600-1⅜)
CIRCLING	480-1	522 (600-1)	480-1½ 522 (600-1½)	520-2 562 (600-2)

HIRL Rwys 8-26 and 12-30

SW-3, 26 NOV 2026 to 24 DEC 2026
SW-3, 26 NOV 2026 to 24 DEC 2026