# RNAV (RNP) Y RWY 31L

PALM SPRINGS INTL (PSP)


| APP CRS | Rwy Ldg | 8500 |
|---|---|---|
| 308° | TDZE | 430 |
| | Apt Elev | 477 |

RNP AR APCH - GPS, RF, min RNP 0.30. Authorization required.

For uncompensated Baro-VNAV systems, procedure NA below 4°C or above 54°C.


MISSED APPROACH: Climb to 900 then climbing right turn to 4000 direct TANFY and track 107° to BANPE and track 144° to TRM VORTAC and hold. Missed approach requires minimum climb of 365 feet per NM to 2200; if unable to meet climb gradient, see RNAV (GPS) Z RWY 31L.

| ATIS | SOCAL APP CON | PALM SPRINGS TOWER ★ | GND CON | UNICOM |
|---|---|---|---|---|
| 124.65 | 126.7 370.95<br>135.275 251.1 | 119.7 (CTAF) L 377.05 | 121.9 | 122.95 |

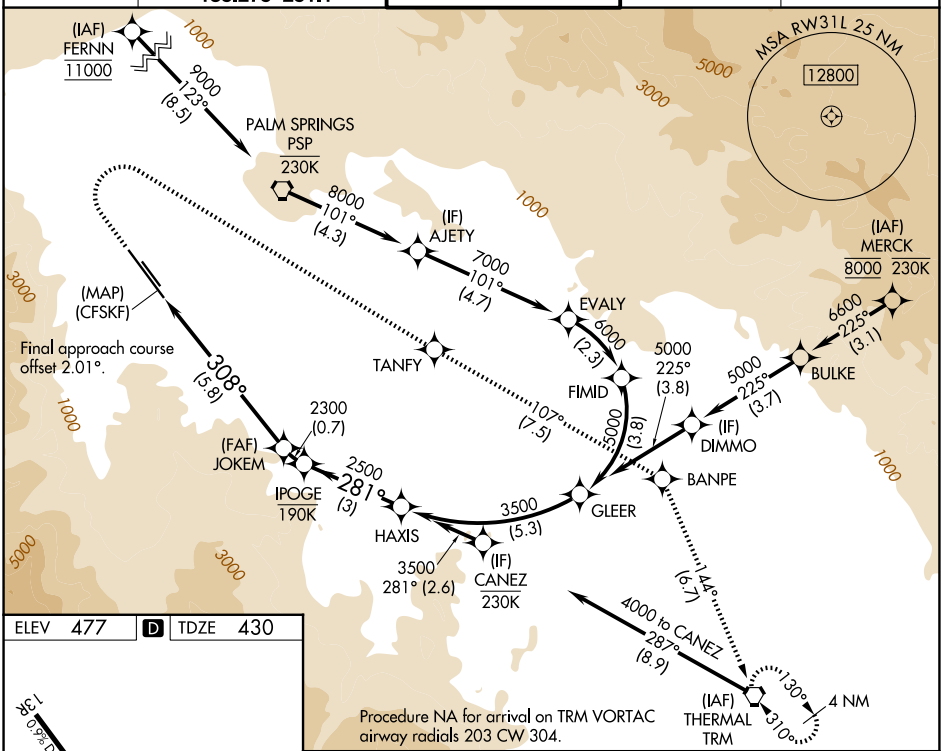



Procedure NA for arrival on TRM VORTAC airway radials 203 CW 304.

ELEV 477 D TDZE 430

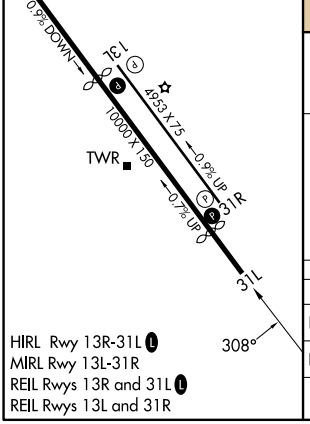


HIRL Rwy 13R-31L L
MIRL Rwy 13L-31R
REIL Rwys 13R and 31L L
REIL Rwys 13L and 31R

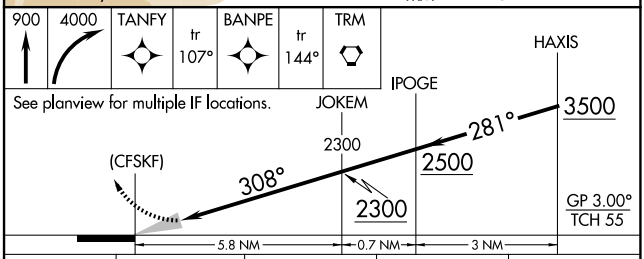


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| RNP 0.13 DA | 680-¾ 250 (300-¾) | | | |
| RNP 0.30 DA | 718-⅞ 288 (300-⅞) | | | |

AUTHORIZATION REQUIRED



SW-3, 26 NOV 2026 to 24 DEC 2026
SW-3, 26 NOV 2026 to 24 DEC 2026