


APP CRS	Rwy Ldg 11830
259°	TDZE 10
	Apt Elev 13

RNAV (RNP) RWY 26L
DANIEL K INOUEY INTL (HNL) (PHNL)

RNP AR APCH, RF required.		MALSF	MISSED APPROACH: Climb to 3000 on track 259° to KABTE, left turn to LAYIG, then track 133° to ALANA and hold. Missed approach requires minimum climb of 234 feet per NM to 300.
▼ For uncompensated Baro-VNAV systems, procedure NA below 15°C (58°F) or above 53°C (128°F).		Ⓜ	

D-ATIS 127.9 251.15	HCF APPROACH 118.3 269.0	HONOLULU TOWER 118.1 257.8 123.9 273.575 (8R/26L)	GND CON 121.9 348.6	CLNC DEL 121.4 281.4
-------------------------------	------------------------------------	---	-------------------------------	--------------------------------

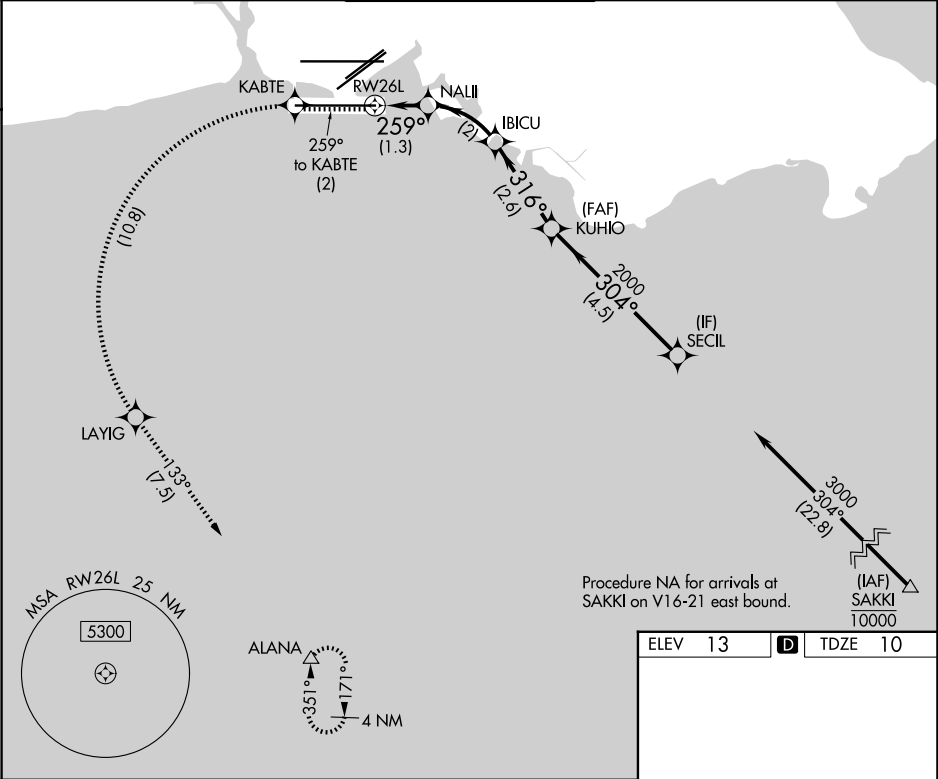

3000 ↑ tr 259°	KABTE ✧	LAYIG ✧	tr 133°	ALANA △		
					SECIL	
					GP 3.00° TCH 75	
CATEGORY		A	B	C		D
RNP 0.15 DA		260-¾ 250 (300-¾)				
AUTHORIZATION REQUIRED						

ELEV 13	TDZE 10
---------	---------

MIRL Rwy 4L-22R
REIL Rwys 4L, 8R, 22L, 22R, and 26R
HIRL Rwys 4R-22L, 8L-26R, and 8R-26L

PAC, 22 JAN 2026 to 19 MAR 2026

PAC, 22 JAN 2026 to 19 MAR 2026