

(MKK5.MKK) 26246

AL-754 (FAA)

MOLOKAI FIVE DEPARTURE


DANIEL K INOUE INTL (HNL) (PHNL)
HONOLULU, HAWAII

TOP ALTITUDE:
ASSIGNED BY ATC

▲ ZIGIE
RADAR and DME required

HCF APPROACH
124.8 317.6
D-ATIS
127.9 251.15
CLNC DEL
121.4 281.4
GND CON
121.9 348.6
HONOLULU TOWER
118.1 257.8
123.9 273.575 (BR/26L)

TAKEOFF MINIMUMS
Rwys 26L/R: Standard.
Rwys 4L/R: Standard with minimum
climb of 425' per NM to
1900, do not exceed
180K until established on
assigned heading.
Rwy 8L: Standard with minimum climb
of 313' per NM to 1400.
Rwy 8R: Standard with minimum climb
of 296' per NM to 500.

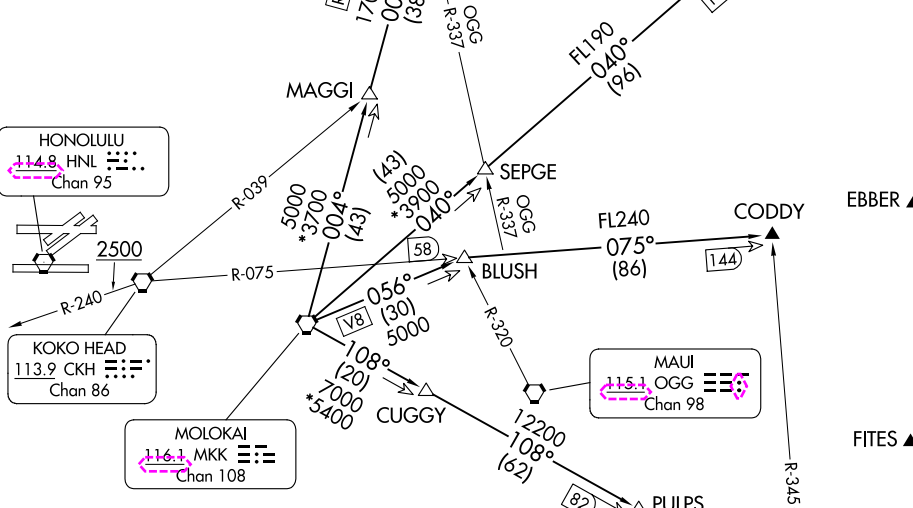

- NOTE: Departures from Rwys 26L/R must complete left turn to assigned heading within 2 NM of runway departure end (HNL 3 DME). Cross egress fixes at assigned cruising altitude.
- NOTE: Departures from Rwys 4L/R and 8L/R must complete right turn to assigned heading within 2 NM of runway departure end. Cross CKH R-240 at or above 2500.
- NOTE: REXIE Transition: Expect clearance to ZIGIE then on assigned route.
- NOTE: KOLEA Transition: Expect clearance to CLUTS then on assigned route.
- NOTE: CODDY Transition: Expect clearance to EBBER or FITES then on assigned route.

(CONTINUED ON FOLLOWING PAGE)

MOLOKAI FIVE DEPARTURE

(MKK5.MKK) 03NOV22

HONOLULU, HAWAII
DANIEL K INOUE INTL (HNL) (PHNL)

PAC: 03 SEP 2026 to 29 OCT 2026

PAC: 03 SEP 2026 to 29 OCT 2026