RNAV (RNP) Z RWY 10

HARTSFIELD/JACKSON ATLANTA INTL (ATL)


APP CRS	Rwy Ldg	9000
095°	TDZE	1000
	Apt Elev	1026

For uncompensated Baro-VNAV systems, procedure NA below -8°C (18°F) or above 54°C (130°F). GPS required. Simultaneous approach authorized; arrivel from ROBNS NA. For inop ALS, increase RNP 0.11 DA all Cats visibility to RVR 4500.


ALSF-2

MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 direct SCARR and hold.


D-ATIS	ATLANTA APP CON	ATLANTA TOWER 8L-26R	8R-26L	9L-27R	9R-27L	10-28	ALL RWYS	GND CON (8L-26R,8R-26L)	(9L-27R,9R-27L)	10-28	ALL RWYS
119.65	134.725 379.9	119.1	125.325	123.85	119.3	119.5	254.4	121.9	121.75	121.65	254.4

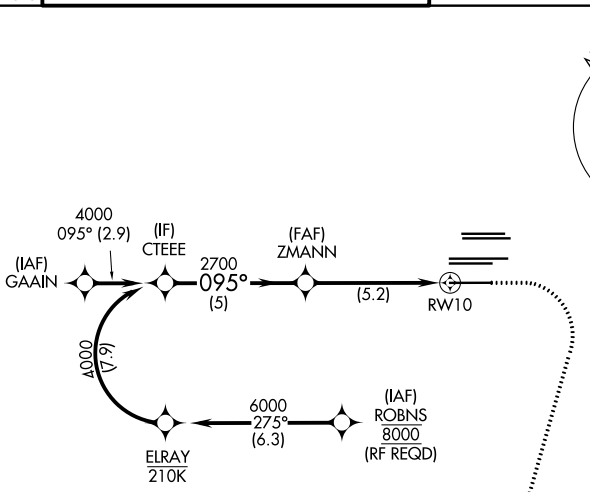

MISSED APCH FIX




ELEV 1026 D TDZE 1000

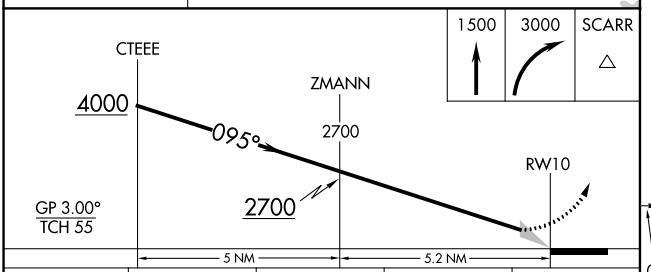

CATEGORY	A	B	C	D
RNP 0.11 DA	1290/24		290 (300-½)	
RNP 0.30 DA	1456/50		456 (500-1)	

AUTHORIZATION REQUIRED



HIRL all Rwys
TDZL/RCLS Rwys 8L, 9R, 10, 26R, 27L and 28

SE-4, 29 OCT 2026 to 26 NOV 2026
SE-4, 29 OCT 2026 to 26 NOV 2026