


LOC/DME I-PKU 111.75 Chan 54 (Y)	APP CRS 275°	Rwy Ldg TDZE 998 Apt Elev 1026
--	------------------------	--

ILS or LOC RWY 28
HARTSFIELD/JACKSON ATLANTA INTL (ATL)

RNAV 1-GPS or RADAR required for procedure entry. From TERII: RNAV 1-GPS required. DME or RADAR required.		ALSf-2 	MISSED APPROACH: Climb to 1500 then climbing left turn to 3000 on heading 216° and LGC VORTAC R-062 to PAJVO/LGC 28 DME/RADAR and hold.
Simultaneous approach authorized.			

D-ATIS ARR 119.65 DEP 125.55	ATLANTA APP CON 127.9 379.9	ATLANTA TOWER 8L-26R 8R-26L 9L-27R 9R-27L 10-28 RWYS 119.1 125.325 123.85 119.3 119.5 254.4					ALL RWYS 121.9 121.75 121.65 254.4	GND CON (8L-26R,8R-26L) (9L-27R,9R-27L) 10-28 RWYS	ALL RWYS
--	--	--	--	--	--	--	---	---	-------------

CLNC DEL 118.1	CPDLC
-----------------------------	-------

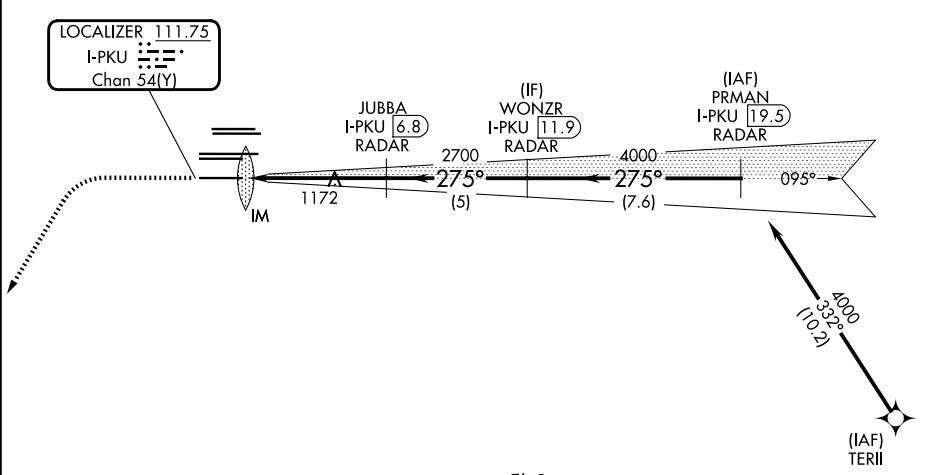

1500 3000	hdg 216°	LGC R-062	PAJVO LGC 28	VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 72).
I-PKU 1.7	I-PKU 2.8	JUBBA I-PKU 6.8 RADAR	WONZR I-PKU 11.9 RADAR	PRMAN I-PKU 19.5 RADAR
0.1	1.1 NM	4 NM	5 NM	7.6 NM
CATEGORY	A	B	C	D
S-ILS 28	1198/18		200 (200-½)	
S-LOC 28	1440/24	442 (500-½)	1440/45	442 (500-¾)

ELEV 1026	TDZE 998
HIRL all Rwy's TDZ/CL Rwy's 8L, 9R, 10, 26R, 27L and 28	
FAF to MAP 5.2 NM	
Knots	60 90 120 150 180
Min:Sec	5:12 3:28 2:36 2:05 1:44

SE-4, 04 SEP 2025 to 02 OCT 2025

SE-4, 04 SEP 2025 to 02 OCT 2025