

LANAI CITY, HAWAII

AL-777 (FAA)

25051

LOC/DME I-LNY	APP CRS	Rwy Idg	5000
111.1	033°	TDZE	1307
Chan 48		Apt Elev	1308

ILS or LOC RWY 3



LANAI (LNY)(PHNY)

DME required.


NA Circling Rwy 21 NA at night. Autopilot coupled approach NA below 1505. When local altimeter setting not received, procedure NA, except for operators with approved weather reporting service. Circling NA for Cat C southeast of Rwy 3-21.

MISSED APPROACH: Climb to 1800 then climbing left turn to 3500 on heading 224° and LNY VORTAC R-278 to GRAMY INT/LNY VORTAC 10 DME and hold.

AWOS-3P 118.375	HCF CENTER 119.3 307.1	CTAF 122.9
--------------------	---------------------------	---------------

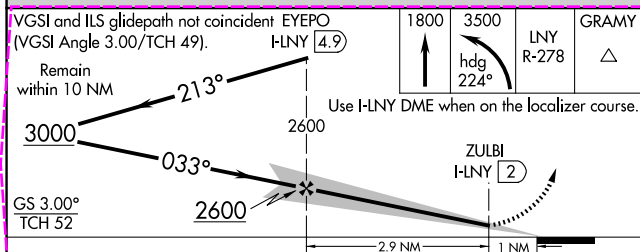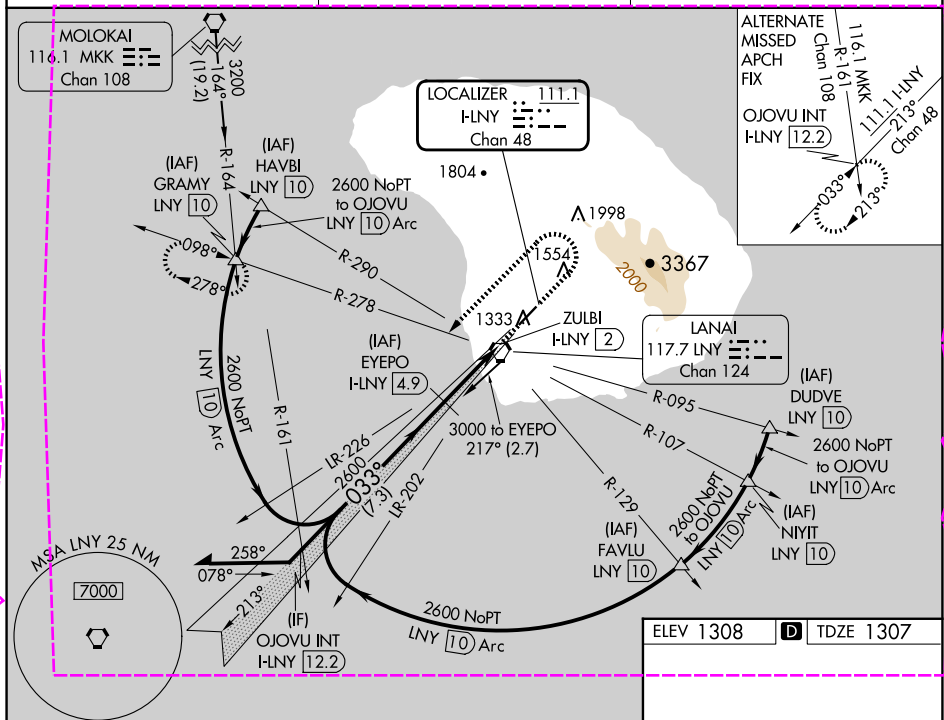

CATEGORY	A	B	C	D
S-ILS 3	1588-1	281 (300-1)		
S-LOC 3	1580-1 1/4	273 (300-1 1/4)		
CIRCLING	1900-1 1/4 592 (600-1 1/4)	1940-1 1/4 632 (700-1 1/4)	2140-2 1/2 832 (900-2 1/2)	NA

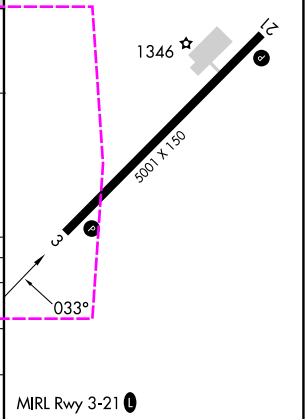

LANAI CITY, HAWAII
Amdt 1C 12AUG21

20°47'N-156°57'W

LANAI (LNY)(PHNY)

ILS or LOC RWY 3

LOC/DME F/LNY	APP CRS	Rwy Ldg	5000
111.1	033°	TDZE	1307
Chan 48		Apt Elev	1308

ILS or LOC RWY 3
LANAI (LNY)(PHNY)


DME required.

NA Circling Rwy 21 NA at night. Circling NA for Cat C southeast of Rwy 3-21. Autopilot coupled approach NA below 2300. When local altimeter setting not received, procedure NA, except for operators with approved weather reporting service.

MISSED APPROACH: Climb to 1800 then climbing left turn to 3500 on heading 224° and LNY VORTAC R-278 to GRAMY INT/LNY VORTAC 10 DME and hold.

AWOS-3P
118.375

HCF CENTER
119.3 307.1

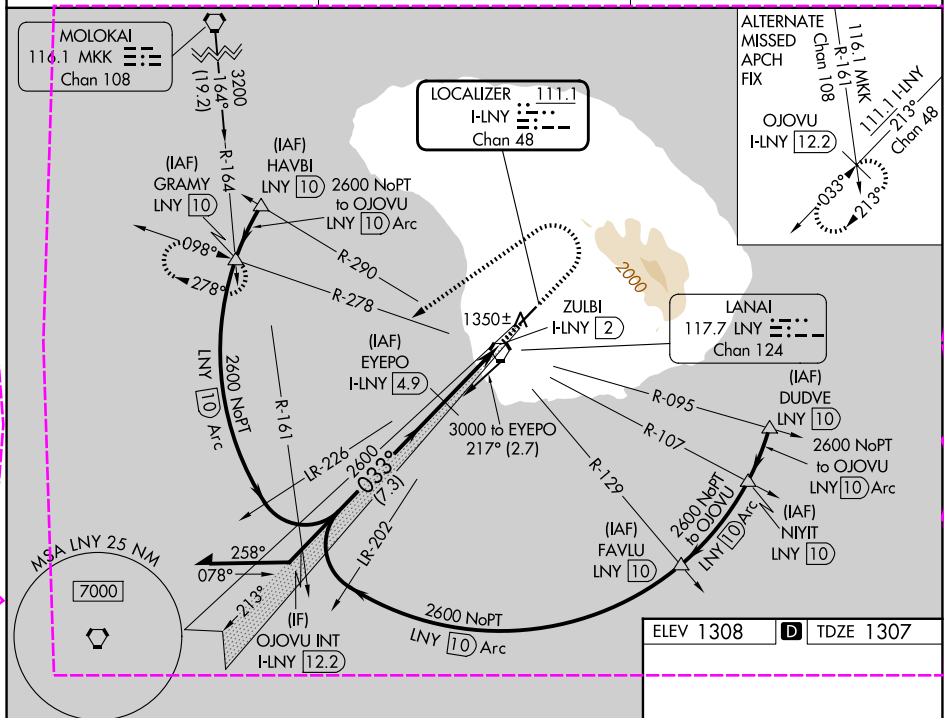CTAF
122.9 **L**

VGSI and ILS glidepath not coincide
(VGSI Angle 3.00/TCH 49).

Remain
within 10 NM

GS 3.00°
TCH 52

coincident EYEPO
I-LNY 4.9

A diagram showing a line segment with a 13-degree angle. The angle is labeled 13° and is formed by a horizontal line segment and a vertical line segment meeting at a point.

2600

A diagram showing a line segment at a 3-degree angle to a vertical dashed line. The angle is labeled 3°.

1800	3500	LNY	GRAMY
------	------	-----	-------

hdg 224°	R-278	△
-------------	-------	---

Use I-LNY DME when on the localizer course.

I-LNY 2

CATEGORY	A	B	C	D
S-ILS 3	1588-1 281 (300-1)			

S-LOC 3 1600-1¼ 293 (300-1¼)

CIRCLING	1900-1¼ 592 (600-1¼)	1940-1¼ 632 (700-1¼)	2240-2¾ 932 (1000-2¾)	NA
----------	-------------------------	-------------------------	--------------------------	----

ELEV 1308	D	TDZE 1307
-----------	----------	-----------

MIRL Rwy 3-21 **L**

LANAI CITY, HAWAII
Amdt 1D 27NOV25

20°47'N-156°57'W

LANAI (LNY)(PHNY)
ILS or LOC RWY 3

PAC, 27 NOV 2025 to 22 JAN 2026