


APP CRS	Rwy Ldg	12245
079°	TDZE	13
	Apt Elev	13

RNAV (RNP) Z RWY 8L


DANIEL K INOUE INTL (HNL) (PHNL)

RNP AR APCH - GPS.	For uncompensated Baro-VNAV systems, procedure NA below 17°C or above 54°C. For inop ALS, increase RNP 0.15 DA all Cnts visibility to ½ SM. MALSR	MISSED APPROACH: Climb to 420 then climbing right turn to 3000 direct ALANA and hold.
--------------------	---	---

D-ATIS	HCF APPROACH	HONOLULU TOWER	GND CON	CLNC DEL
127.9 251.15	118.3 269.0	118.1 257.8 123.9 273.575 (8R/26L)	121.9 348.6	121.4 281.4

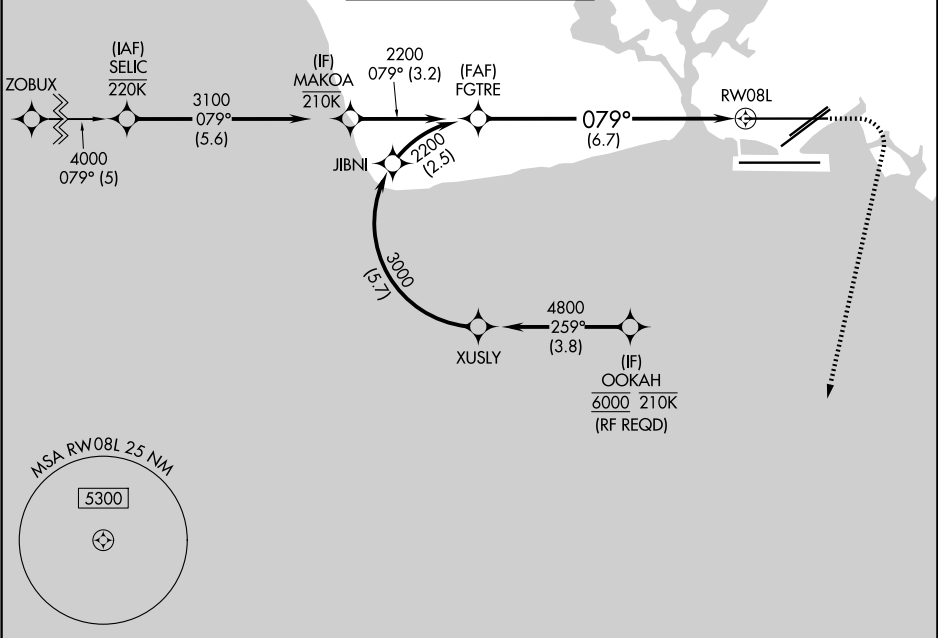

ELEV	13	D	TDZE	13
------	----	---	------	----

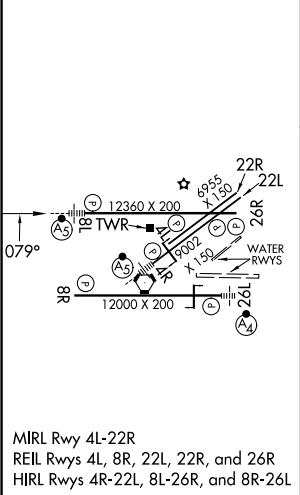

ALANA 351° 171° 4 NM				
MAKOA VGS and RNAV glidepath not coincident (VGS Angle 3.00/TCH 73). FGTR 3100 079° 2200 GP 3.00° TCH 56 3.2 NM 6.7 NM RW08L See planview for multiple IF locations.				
CATEGORY	A	B	C	D
RNP 0.15 DA		285-½	272 (300-½)	
RNP 0.30 DA		347-½	334 (400-½)	
AUTHORIZATION REQUIRED				

PAC, 27 NOV 2025 to 22 JAN 2026

PAC, 27 NOV 2025 to 22 JAN 2026