

ATLANTA, GEORGIA

AL-26 (FAA)

25219

WAAS CH 61299 W28A	APP CRS 275°	Rwy Ldg TDZE 998 Apt Elev 1026
--	------------------------	--

RNAV (GPS) Y RWY 28


HARTSFIELD/JACKSON ATLANTA INTL (ATL)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C (20°F) or above 54°C (130°F). Simultaneous approach authorized with Rwy 26R or 26L or 27R, or Rwys 26R and 27R. DME/DME RNP-0.3 NA. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

ALSf-2
A
MISSED APPROACH:
Climb to 1500 then climbing left turn to 3000 direct SCARR and hold.

D-ATIS ARR 119.65 DEP 125.55	ATLANTA APP CON 127.9 379.9	ATLANTA TOWER ALL RWYS				GND CON ALL RWYS
		8L-26R	8R-26L	9L-27R	9R-27L	10-28
		119.1	125.325	123.85	119.3	119.5 254.4
					121.9	121.75 121.65 254.4


CINC DEL 118.1	CPDLC
-----------------------------	-------

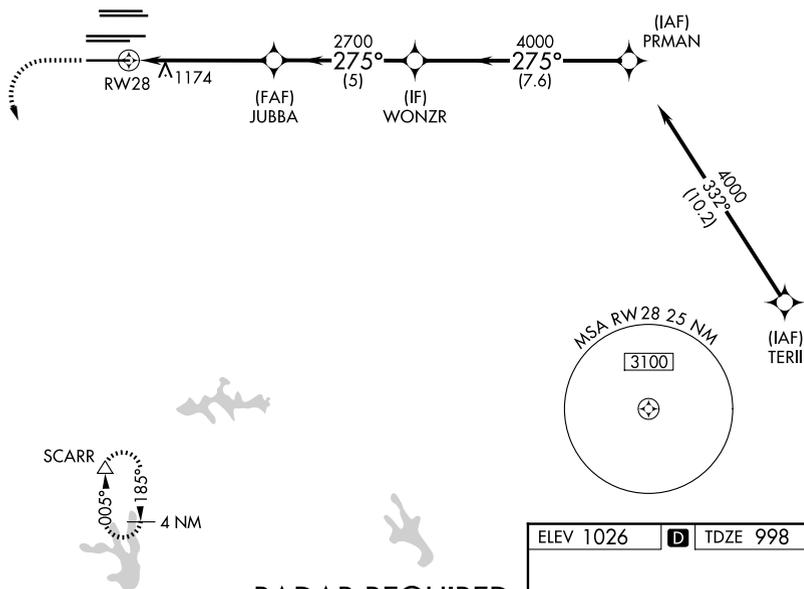

SE-4, 19 FEB 2026 to 19 MAR 2026

SE-4, 19 FEB 2026 to 19 MAR 2026

ELEV 1026	<input checked="" type="checkbox"/> TDZE 998
<p>1500 3000 SCARR ↑ ↘ △</p> <p>*LNAV only.</p> <p>RW28 → JUBBA (2700) → WONZR (4000) → PRMAN (4000)</p> <p>GP 3.00° TCH 57</p>	
CATEGORY	A (1.2 NM) B (5 NM) C (7.6 NM) D
LPV DA	1198/18 200 (200-½)
LNAV/VNAV DA	1250/24 252 (300-½)
LNAV MDA	1440/24 442 (500-½) 1440/45 442 (500-¾)

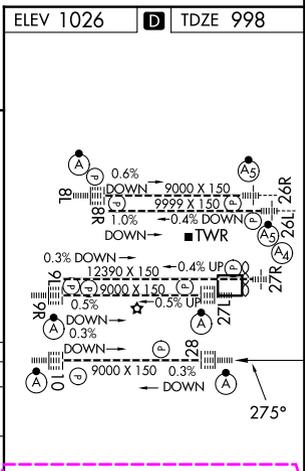

HIRL all Rwys
TDZ/CL Rwys 8L, 9R, 10, 26R,
27L and 28

ATLANTA, GEORGIA
Amdt 4A 12OCT17

HARTSFIELD/JACKSON ATLANTA INTL (ATL)
33°38'N-84°26'W
RNAV (GPS) Y RWY 28

