RNAV (GPS) Y RWY 16R

MAHLON SWEET FLD (EUG)

WAAS	APP CRS	Rwy Ldg	8009
CH 86518	164°	TDZE	364
W16B		Apt Elev	374

RNP APCH.

Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500, increase LNAV Cat C/D visibility to RVR 5500.

ALSF-2

MISSED APPROACH: Climb to 5000 direct TIPIE and on track 229° to VAUGN and hold, continue climb-in-hold to 5000.

ATIS	CASCADE APP CON★	EUGENE TOWER★	GND CON	UNICOM
125.225	119.6 348.7	118.9 (CTAF) L 371.9 (16R/34L) 124.15 371.9 (16L/34R)	121.7 269.5	122.95

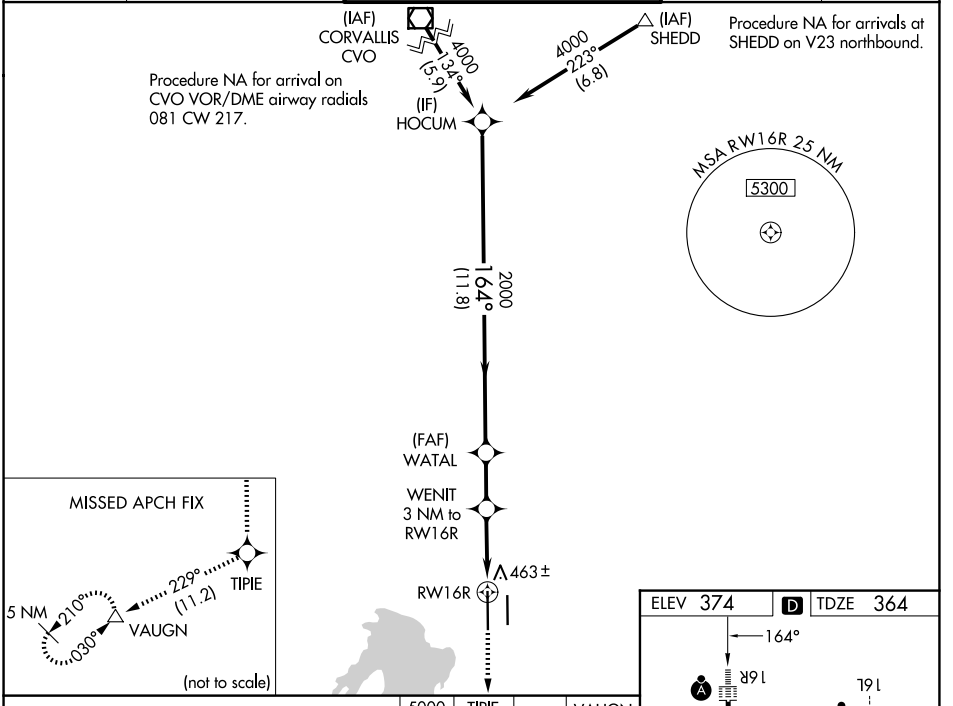

CATEGORY	A	B	C	D
LPV DA	564/18 200 (200-½)			
LNAV/VNAV DA	628/24 264 (300-½)			
LNAV MDA	720/24 356 (400-½)		720/30 356 (400-⅝)	
CIRCLING	820-1 446 (500-1)	840-1 466 (500-1)	1000-1¾ 626 (700-1¾)	1140-2½ 766 (800-2½)

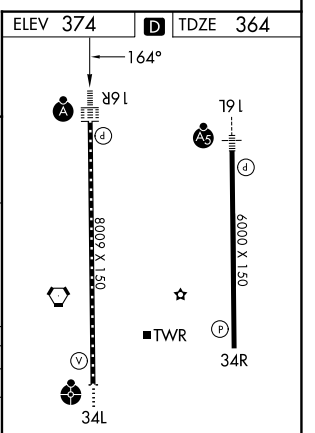

TDZL/RCLS Rwy 16R
REIL Rwy 34R L
HIRL Rwys 16L-34R and 16R-34L

NW-1, 11 JUN 2026 to 09 JUL 2026
NW-1, 11 JUN 2026 to 09 JUL 2026