


**TOP ALTITUDE:  
ASSIGNED BY ATC**

SOCAL DEP CON  
124.3 363.2  
D-ATIS DEP  
135.65  
CLNC DEL  
120.35 327.0  
CPDLC  
GND CON  
(N) 121.65 327.0  
(S) 121.75 327.0  
(W) 121.4 327.0  
LOS ANGELES TOWER  
(N) 133.9 239.3  
(S) 120.95 379.1

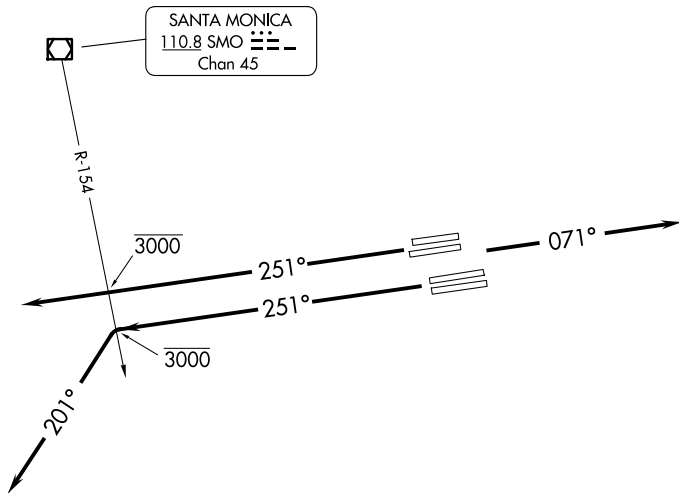

**TAKEOFF MINIMUMS**

Rwys 6L/R, 7L/R, 24L/R, 25L/R: Standard.



NOTE: TAKEOFF RWYS 24L/R, 25L/R: This departure is for non-turbojet aircraft. Turbojet aircraft use LAXX DEPARTURE.  
NOTE: South Complex turn at SMO R-154 to 201° is required for ATC separation.

NOTE: Chart not to scale.

### DEPARTURE ROUTE DESCRIPTION

**TAKEOFF RUNWAYS 6L/R, 7L/R:** Climb on heading 071° for RADAR vectors to SLI VORTAC, thence. . . .

**TAKEOFF RUNWAYS 24L/R:** Climb on heading 251° to cross SMO R-154 at or below 3000, then RADAR vectors to SLI VORTAC, thence. . . .

**TAKEOFF RUNWAYS 25L/R:** Climb on heading 251° to cross SMO R-154 at or below 3000, then turn left heading 201° for RADAR vectors to SLI VORTAC, thence. . . .

. . . .on (assigned route). All aircraft expect further clearance to filed altitude 5 minutes after departure.

**LOST COMMUNICATIONS:** If not in contact with Departure Control within five minutes after departure, climb to FL230 or filed altitude whichever is lower. Aircraft filing FL240 or above climb to filed altitude ten minutes after departure.

SW-3, 11 JUN 2026 to 09 JUL 2026

SW-3, 11 JUN 2026 to 09 JUL 2026