

WAAS CH <b>90137</b> <b>W16B</b>	APP CRS <b>153°</b>	Rwy Ldg TDZE Apt Elev	<b>5201</b> <b>3432</b> <b>3459</b>
--	------------------------	-----------------------------	---

# RNAV (GPS) Y RWY 16


BEND MUNI (BDN)

RNP APCH - GPS.


**⚠** Rwy 16 helicopter visibility reduction below 3/4 SM NA. VDP NA when using Redmond altimeter setting. When local altimeter setting not received, use Redmond altimeter setting and increase all MDAs 100 feet and LP visibility Cats C and D 3/4 SM, LNAV visibility Cats C and D 1/2 SM, and Circling visibility Cat C 1/2 SM.

MISSED APPROACH: Climb to 7400 direct HITUP and on track 064° to REMTE and hold, continue climb-in-hold to 7400.

AWOS-3 <b>134.425</b>	SEATTLE CENTER <b>126.15 269.475</b>	UNICOM <b>123.0 (CTAF) 0</b>
--------------------------	---	---------------------------------

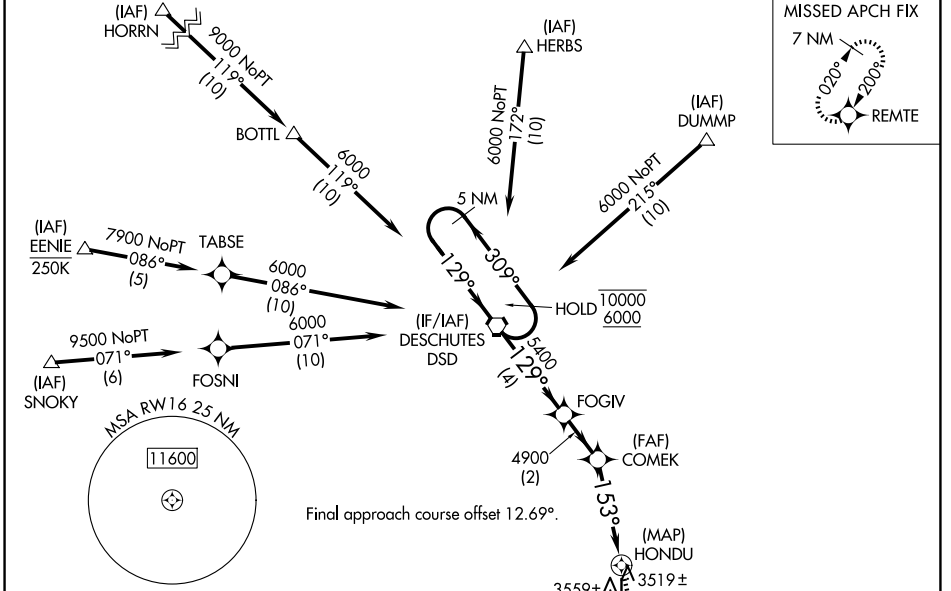

ELEV 3459	TDZE 3432
-----------	-----------

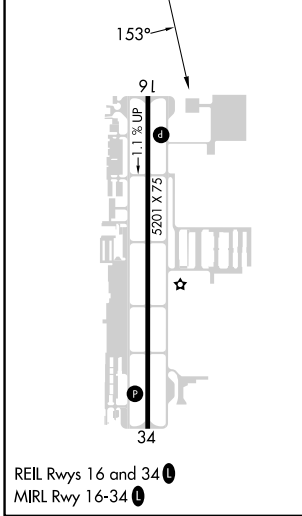

5 NM Holding Pattern	DSD VORTAC	FOGIV	7400	HITUP	tr 064°	REMTE
10000 6000	309° 129°	129°	5400	4900	153°	0.6 NM to HONDU
VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 38).						
4 NM		2 NM		3.3 NM		0.6 0.5
CATEGORY	A		B		C	
LP MDA	3780-1 348 (400-1)					
LNAV MDA	3820-1 388 (400-1)		3820-1 3/8 388 (400-1 3/8)			
CIRCLING	3960-1 501 (600-1)	3980-1 521 (600-1)	4120-1 3/4 661 (700-1 3/4)	4640-3 1181 (1200-3)		

NW-1, 11 JUN 2026 to 09 JUL 2026

NW-1, 11 JUN 2026 to 09 JUL 2026