

CHARLOTTE, NORTH CAROLINA

AL-78 (FAA)


26134

LOC/DME I-XUU 110.15 Chan 38 (Y)	APP CRS 003°	Rwy Ldg TDZE 744 Apt Elev 748
--	------------------------	---



ILS RWY 1L (SA CAT I)
CHARLOTTE/DOUGLAS INTL (CLT)

DME or RADAR required. RADAR required for procedure entry.	ALSF-2	MISSED APPROACH: Climb to 1200 then climbing left turn to 4000 on heading 280° and on BZM VOR/DME R-184 to BUDKE/BZM 26.5 DME/RADAR and hold.
Simultaneous approach authorized. Requires specific OPSPEC, MSPEC, or LOA approval.		

D-ATIS	CHARLOTTE APP CON	CHARLOTTE TOWER	GND CON
121.15	128.325 (001°-119°) 120.05 (120°-295°) 134.75 (296°-360°)	118.1 257.8 (18L-36R) 126.4 257.8 (18C-36C) 133.35 257.8 (11L-19R)	121.8 348.6 (W) 121.9 348.6 (E)

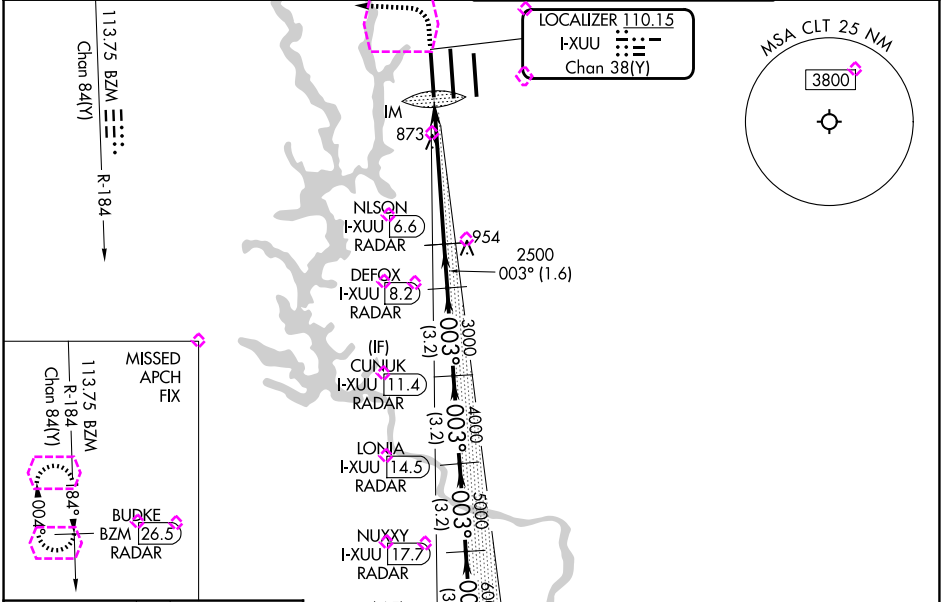

ELEV 748	D	TDZE 744
----------	---	----------

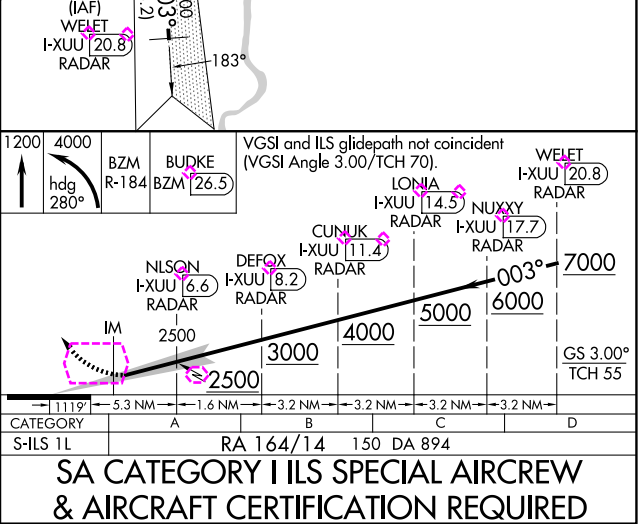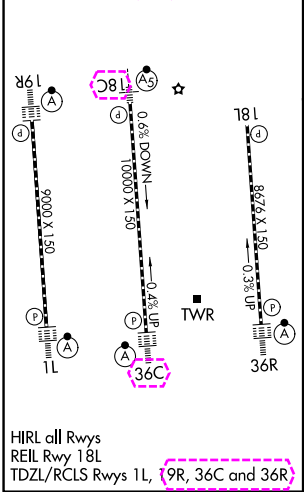

CHARLOTTE, NORTH CAROLINA
Amdt 2 14MAY26

35°13'N-80°57'W

CHARLOTTE/DOUGLAS INTL (CLT)
ILS RWY 1L (SA CAT I)

SE-2: 11 JUN 2026 to 09 JUL 2026

SE-2: 11 JUN 2026 to 09 JUL 2026

CHARLOTTE, NORTH CAROLINA

AL-78 (FAA)




26190

LOC/DME I-XUU 110.15 Chan 38 (Y)	APP CRS 003°	Rwy Ldg TDZE 744 Apt Elev 748
--	------------------------	---

ILS RWY 1L (SA CAT I)
CHARLOTTE/DOUGLAS INTL (CLT)

DME or RADAR required. RADAR required for procedure entry.	ALSIF-2	MISSED APPROACH: Climb to 1200 then climbing left turn to 4000 on heading 280° and on BZM VOR/DME R-184 to BUDKE/BZM 26.5 DME/RADAR and hold.
Simultaneous approach authorized. Requires specific OPSPEC, MSPEC, or LOA approval.		

D-ATIS	CHARLOTTE APP CON	CHARLOTTE TOWER	GND CON
121.15	128.325 (001°-119°) 120.05 (120°-295°) 134.75 (296°-360°)	118.1 257.8 (18L-36R) 126.4 257.8 (1R-19L) 133.35 257.8 (11L-19R)	121.8 348.6 (W) 121.9 348.6 (E)

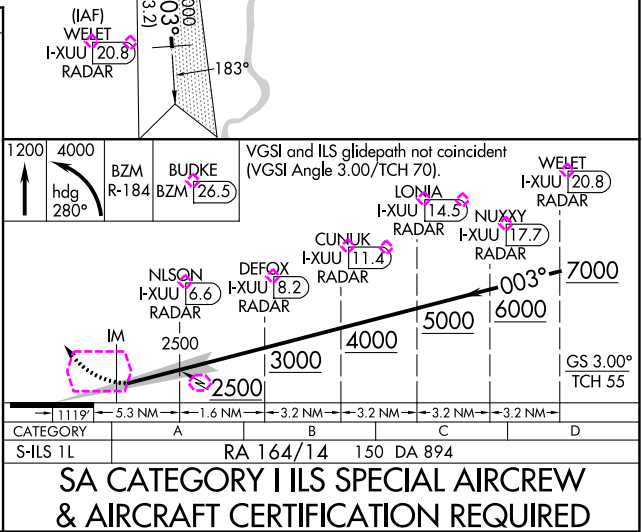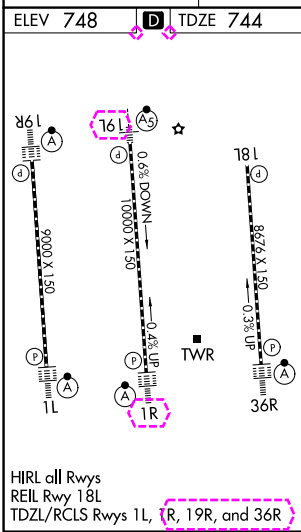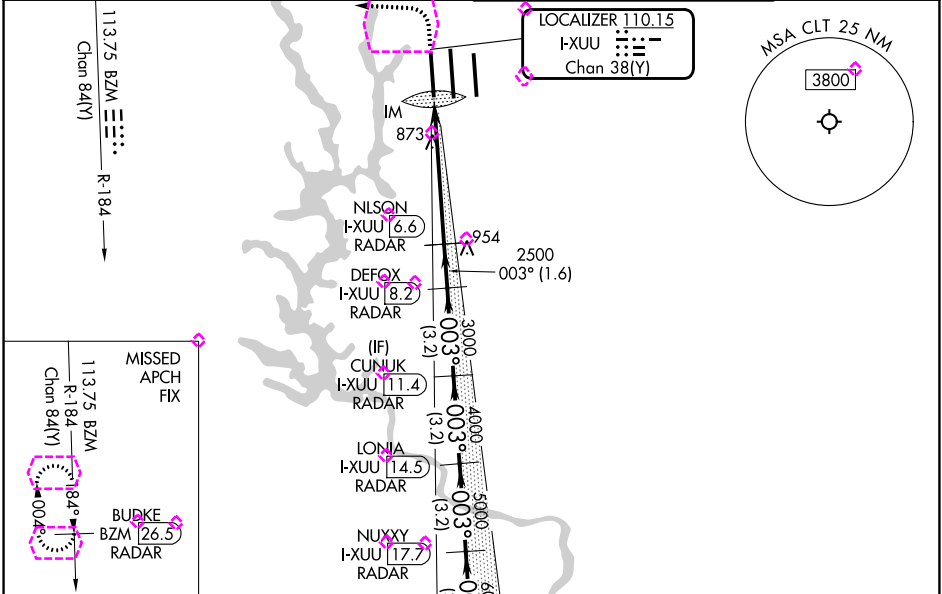

CHARLOTTE, NORTH CAROLINA
Amdt 2 14MAY26

35°13'N-80°57'W

CHARLOTTE/DOUGLAS INTL (CLT)
ILS RWY 1L (SA CAT I)

SE-2, 09 JUL 2026 to 06 AUG 2026

SE-2, 09 JUL 2026 to 06 AUG 2026