

(KRITR7.KRITR) 26134

AL-78 (FAA)

CHARLOTTE/DOUGLAS INTL (CLT)

CHARLOTTE, NORTH CAROLINA

KRITR SEVEN DEPARTURE (RNAV)

CHARLOTTE DEP CON

120.5 257.2

D-ATIS DEP

132.1

CLNC DEL

127.15 348.6

CPDLC

GND CON

121.8 348.6 (W)

121.9 348.6 (E)

CHARLOTTE TOWER

118.1 257.8 (18L-36R)

126.4 257.8 (18C-36C)


133.35 257.8 (1L-19R)

FILDS

**TOP ALTITUDE:
8000**

RNAV 1 - DME/DME/IRU or GPS.

RADAR required.

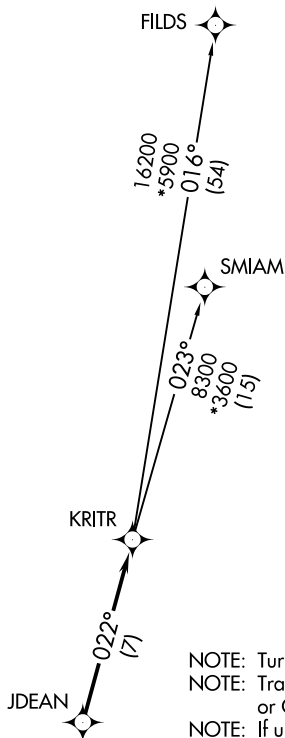


NOTE: Turbojet only.

NOTE: Transponder code will be issued via PDC or CLT CLNC DEL.

NOTE: If unable to accept climb rates, advise ATC on initial contact.


NOTE: Accelerate to 250K, if unable advise ATC. Upon reaching 10000 MSL, accelerate to and maintain 280K, if unable advise ATC.

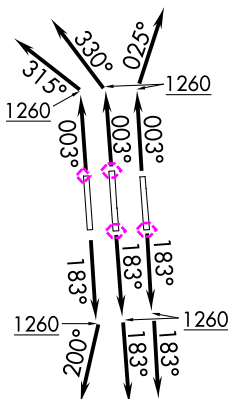

TAKEOFF MINIMUMS

Rwys 18L/C, 19R, 36C/R: Standard with minimum climb of 500' /NM to 1260'.

Rwy 1L: Standard with minimum climb of 500' /NM to 1400'.



NOTE: Chart not to scale.

(CONTINUED ON FOLLOWING PAGE)

KRITR SEVEN DEPARTURE (RNAV)

(KRITR7.KRITR) 14MAY26

CHARLOTTE, NORTH CAROLINA

CHARLOTTE/DOUGLAS INTL (CLT)

SE-2, 11 JUN 2026 to 09 JUL 2026

SE-2, 11 JUN 2026 to 09 JUL 2026

(KRITR7.KRITR) 26134

AL-78 (FAA)

CHARLOTTE/DOUGLAS INTL (CLT)
CHARLOTTE, NORTH CAROLINA

KRITR SEVEN DEPARTURE (RNAV)



DEPARTURE ROUTE DESCRIPTION
SEE ADDITIONAL REQUIREMENTS ON AAUP

TAKEOFF RUNWAY 1L: Climb on heading 003° to 1260, then on heading 315° or as assigned by ATC for RADAR vectors to JDEAN, thence.
TAKEOFF RUNWAYS 18L/C: Climb on heading 183° to 1260, then on heading 183° or as assigned by ATC for RADAR vectors to JDEAN, thence. . .
TAKEOFF RUNWAY 19R: Climb on heading 183° to 1260, then on heading 200° or as assigned by ATC for RADAR vectors to JDEAN, thence. . .
TAKEOFF RUNWAY 36C: Climb on heading 003° to 1260, then on heading 330° or as assigned by ATC for RADAR vectors to JDEAN, thence. . .
TAKEOFF RUNWAY 36R: Climb on heading 003° to 1260, then on heading 025° or as assigned by ATC for RADAR vectors to JDEAN, thence. . .

. . .on track 022° to KRITR, then on assigned transition. Maintain 8000. Expect filed altitude 10 minutes after departure.

FILDS TRANSITION (KRITR7.FILDS)
SMIAM TRANSITION (KRITR7.SMIAM)

SE-2, 11 JUN 2026 to 09 JUL 2026

SE-2, 11 JUN 2026 to 09 JUL 2026

(KRITR8.KRITR) 26190

AL-78 (FAA)

CHARLOTTE/DOUGLAS INTL (CLT)
CHARLOTTE, NORTH CAROLINA

KRITR EIGHT DEPARTURE (RNAV)



DEPARTURE ROUTE DESCRIPTION
SEE ADDITIONAL REQUIREMENTS ON AAUP

TAKEOFF RUNWAY 1L: Climb on heading 003° to 1260, then on heading 315° or as assigned by ATC for RADAR vectors to JDEAN, thence.

TAKEOFF RUNWAY 1R: Climb on heading 003° to 1260, then on heading 330° or as assigned by ATC for RADAR vectors to JDEAN, thence. . .

TAKEOFF RUNWAYS 18L, 19L: Climb on heading 183° to 1260, then on heading 183° or as assigned by ATC for RADAR vectors to JDEAN, thence. . .

TAKEOFF RUNWAY 19R: Climb on heading 183° to 1260, then on heading 200° or as assigned by ATC for RADAR vectors to JDEAN, thence. . .

TAKEOFF RUNWAY 36R: Climb on heading 003° to 1260, then on heading 025° or as assigned by ATC for RADAR vectors to JDEAN, thence. . .

. . .on track 022° to KRITR, then on assigned transition. Maintain 8000. Expect filed altitude 10 minutes after departure.

FILDS TRANSITION (KRITR8.FILDS)
SMIAM TRANSITION (KRITR8.SMIAM)

SE-2. 09 JUL 2026 to 06 AUG 2026

SE-2. 09 JUL 2026 to 06 AUG 2026