

HONOLULU, HAWAII

AL-754 (FAA)

25219



APP CRS	Rwy Ldg 12245
079°	TDZE 13
	Apt Elev 13

RNAV (GPS) Y RWY 8L

DANIEL K INOUE INTL (HNL) (PHNL)

RNP APCH - GPS.	MALSR 	MISSED APPROACH: Climbing right turn to 3600 direct ALANA and hold, continue climb-in-hold to 3600.
⚠ Circling Rwy 22R NA at night. For inop ALS, increase Cats C, D, and E visibility to 1½ SM. Circling NA to sea lanes 4W, 8W, 22W, and 26W. Circling NA for Cats A and B northwest of Rwy 8L-22R. Circling NA for Cats C and D north of Rwy 8L-26R. OOKAH transition NA for Cat E aircraft. Cat E restricted to USAF/USN aircraft.		

D-ATIS 127.9 251.15	HCF APPROACH 118.3 269.0	HONOLULU TOWER 118.1 257.8 123.9 273.575 (8R/26L)	GND CON 121.9 348.6	CLNC DEL 121.4 281.4
-------------------------------	------------------------------------	---	-------------------------------	--------------------------------

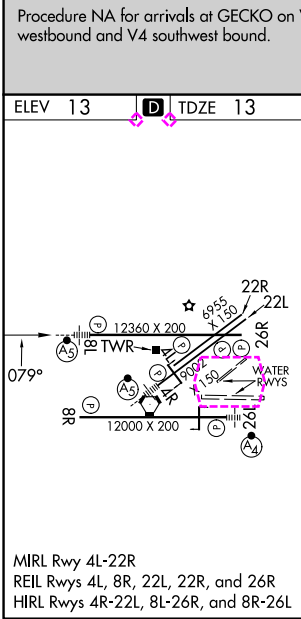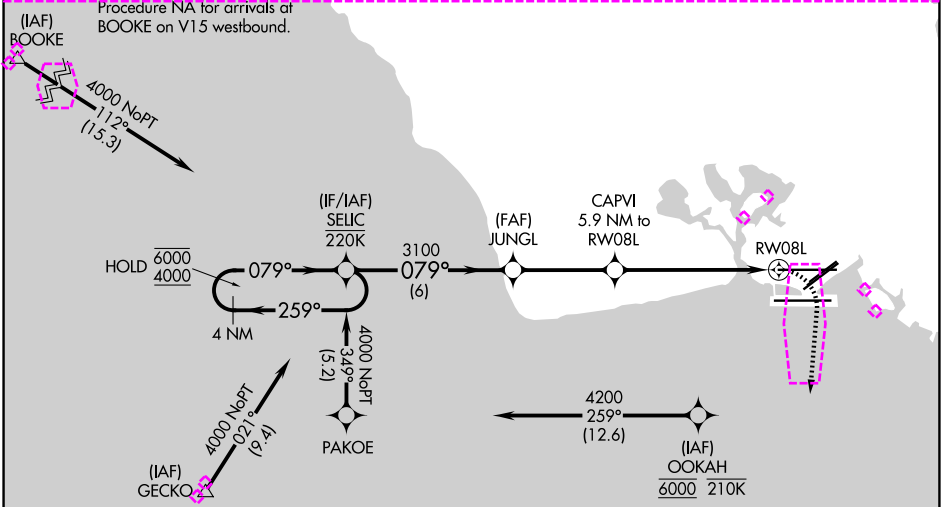

V16

MSA RW08L 25 NM

5300

4 NM Holding Pattern

SELIC

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 73).

3600

ALANA

JUNGL

CAPVI 5.9 NM to RW08L

3.00° TCH 56

1.2 NM to RW08L

RW08L

4 NM

351°

4 NM

6000 ← 259°

4000 → 079°

079°

3100

1940

6 NM

3.6 NM

4.6 NM

1.2

CATEGORY	A	B	C	D	E
LNAV MDA	480-½	467 (500-½)	480-1 467 (500-1)		
CIRCLING	680-1	667 (700-1)	820-2¼ 807 (900-2¼)	1280-3 1267 (1300-3)	NA

HONOLULU, HAWAII
Amdt 4 16MAY24

21°19'N-157°55'W

DANIEL K INOUE INTL (HNL) (PHNL)
RNAV (GPS) Y RWY 8L

PAC: 14 MAY 2026 to 09 JUL 2026

PAC: 14 MAY 2026 to 09 JUL 2026

HONOLULU, HAWAII

AL-754 (FAA)

26190




APP CRS	Rwy Ldg 12245
079°	TDZE 13
	Apt Elev 13

RNAV (GPS) Y RWY 8L

DANIEL K INOUEY INTL (HNL) (PHNL)

RNP APCH - GPS.	MALSR	MISSED APPROACH: Climbing right turn to 3600 direct ALANA and hold, continue climb-in-hold to 3600.
⚠ Circling Rwy 22R NA at night. For inop ALS, increase Cats C, D, and E visibility to 1½ SM. Circling NA to sea lanes 4W, 8W, 22W, and 26W. Circling NA for Cats A and B northwest of Rwy 8L-22R. Circling NA for Cats C and D north of Rwy 8L-26R. OOKAH transition NA for Cat E aircraft. Cat E restricted to USAF/USN aircraft.		

D-ATIS 127.9 251.15	HCF APPROACH 118.3 269.0	HONOLULU TOWER 118.1 257.8 123.9 273.575 (8R/26L)	GND CON 121.9 348.6
-------------------------------	------------------------------------	---	-------------------------------

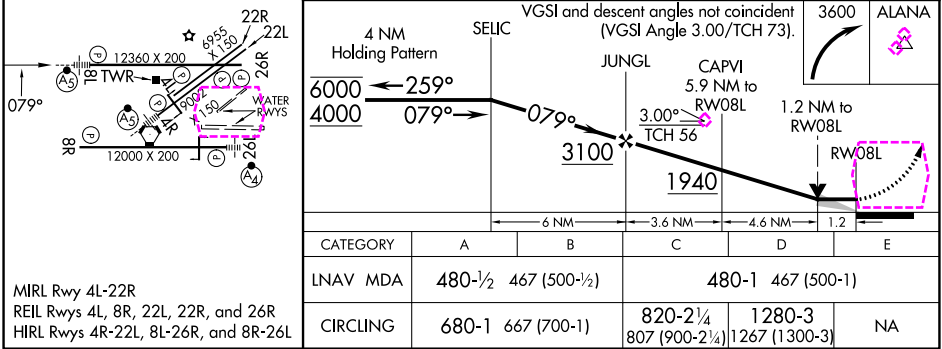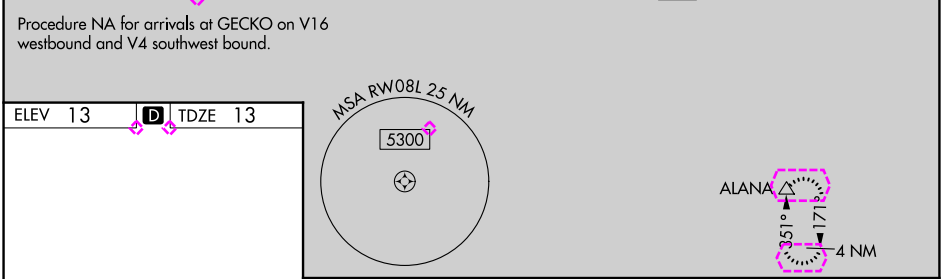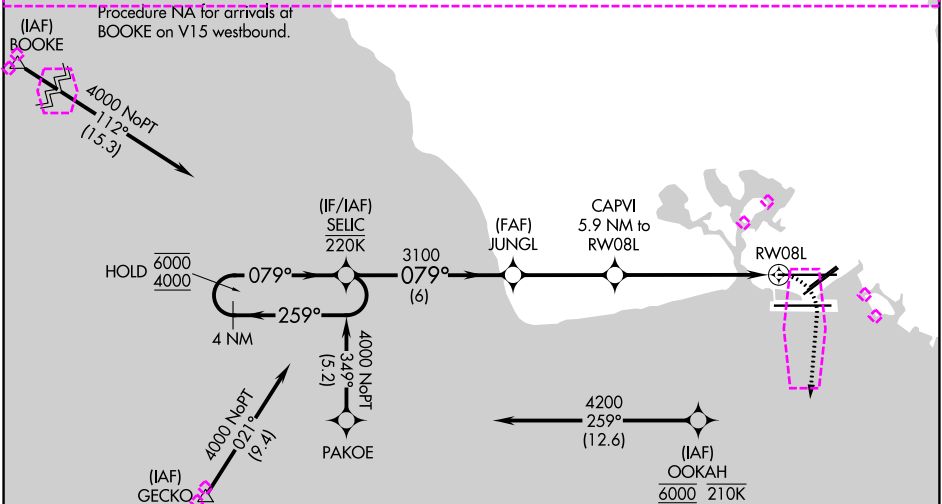

MIRL Rwy 4L-22R	DANIEL K INOUEY INTL (HNL) (PHNL)
REIL Rwys 4L, 8R, 22L, 22R, and 26R	RNAV (GPS) Y RWY 8L
HIRL Rwys 4R-22L, 8L-26R, and 8R-26L	