

LOC/DME I-SGU	APP CRS	Rwy Ldg	9300
110.9	198°	TDZE	2884
Chan 46		Apt Elev	2884

LDA RWY 19
ST GEORGE RGNL (SGU)


V NA
8 -5°C

DME required. For inop ALS, increase S-LDA/GS 19 all Cats visibility to ½ SM.

MALSR

MISSED APPROACH: Climb to 4200 then climbing right turn to 9800 on heading 354° and UTI VOR/DME R-314 to HUNKU INT/ MMM 42.1 DME and hold, continue climb-in-hold to 9800.

AWOS-3PT 135,075	LOS ANGELES CENTER 124.2 343.6	UNICOM 123,075 (CTAF) 1
---------------------	-----------------------------------	----------------------------

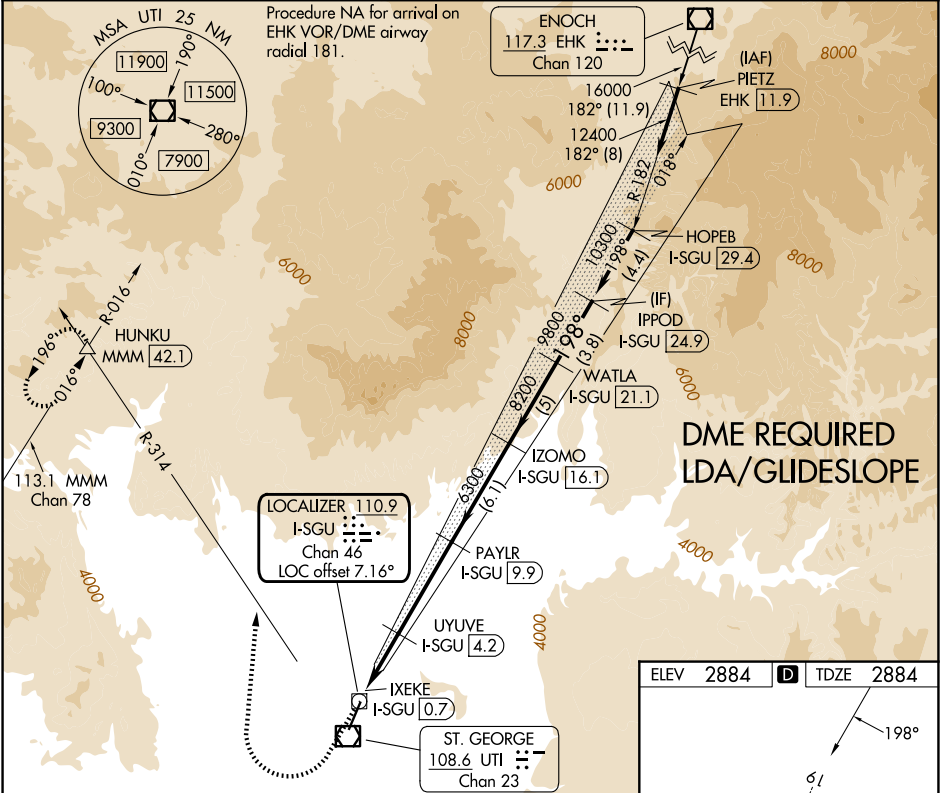

4200	9800	UTI	HUNKU	Use I-SGU DME when on the localizer course.	IPPOD
↑	hdg 354°	R-314	△		I-SGU 24.9
*LDA only.					
IXEKE	UYUVE	PAYLR	IZOMO	WATLA	IPPOD
I-SGU 0.7	I-SGU 4.2	I-SGU 9.9	I-SGU 16.1	I-SGU 21.1	I-SGU 24.9
4300*	6300	6300	8200	9800	10300
0.7	2.3 NM	1.2 NM	5.7 NM	6.1 NM	5 NM
0.7 DME.					3.8 NM
					GS 3.10° TCH 55
CATEGORY	A	B	C	D	
S-LDA/GS 19		3170-½	286 (300-½)		
S-LDA 19	3940-¾ 1056 (1100-¾)	3940-1 1056 (1100-1)	3940-2½ 1056 (1100-2½)		
CIRCLING	3940-1¼ 1056 (1100-1¼)	3940-1½ 1056 (1100-1½)	3940-3 1056 (1100-3)	4660-3 1776 (1800-3)	

