

(LIHUE6.BOOKE) 24025


LIHUE SIX DEPARTURE

AL-776 (FAA)

LIHUE (LIH)(PHLI)
LIHUE, HAWAII

HCF CENTER
126.5 269.4

TOP ALTITUDE:
ASSIGNED BY ATC

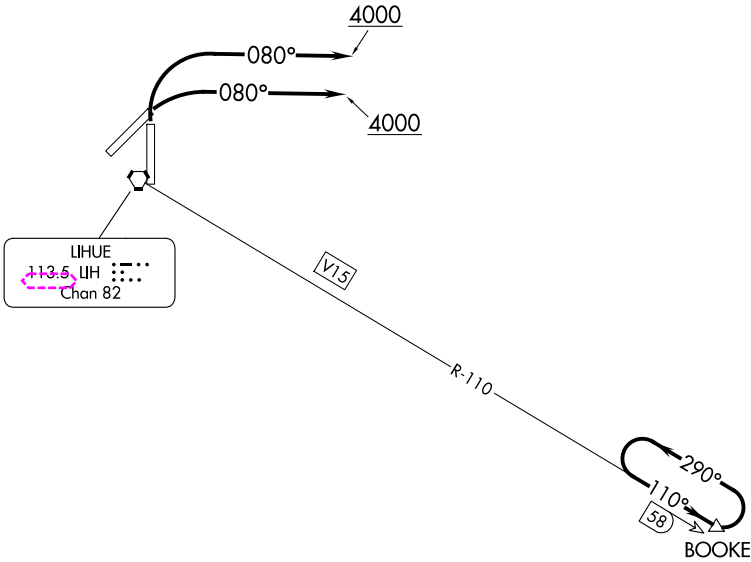

TAKEOFF MINIMUMS

Rwy 3: Standard.
Rwy 35: Standard with minimum climb of 230' per NM to 700.

NOTE: RADAR required.
NOTE: DME required.
NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 3, 35: Climbing right turn heading 080° to 4000, thence. . .

. . . .Expect RADAR vectors to intercept LIH VORTAC R-110 to BOOKE/LIH 58 DME fix, maintain ATC assigned altitude. Expect clearance to filed altitude/flight level 10 minutes after departure.

LOST COMMUNICATIONS: If not in contact with HCF 1 minute after departure, maintain SID heading until 10 NM east of LIH VORTAC, then intercept LIH R-110 to BOOKE DME fix.

(LIHUE6.BOOKE) 26246


LIHUE SIX DEPARTURE

AL-776 (FAA)

LIHUE (LIH)(PHLI)
LIHUE, HAWAII

HCF CENTER
126.5 269.4

TOP ALTITUDE:
ASSIGNED BY ATC

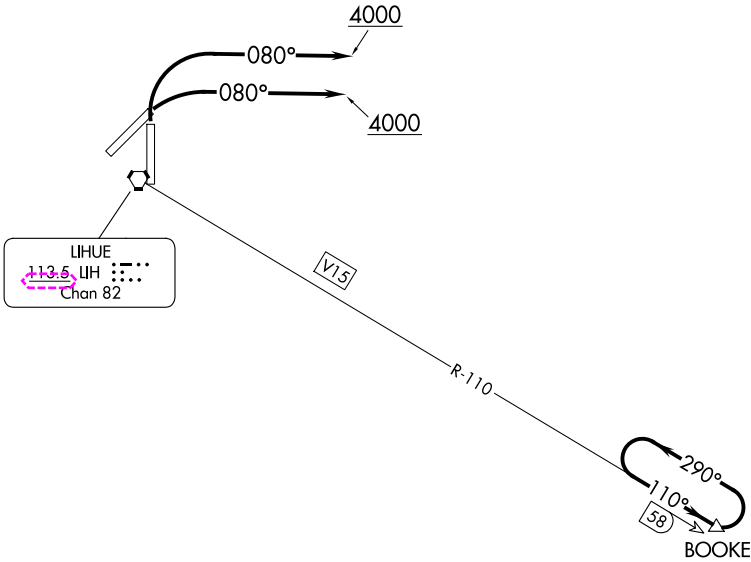

TAKEOFF MINIMUMS

Rwy 3: Standard.
Rwy 35: Standard with minimum climb of 230' per NM to 700.

NOTE: RADAR required.
NOTE: DME required.

NOTE: Chart not to scale.



DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 3, 35: Climbing right turn heading 080° to 4000, thence. . . .

. . . .Expect RADAR vectors to intercept LIH VORTAC R-110 to BOOKE/LIH 58 DME fix, maintain ATC assigned altitude. Expect clearance to filed altitude/flight level 10 minutes after departure.

LOST COMMUNICATIONS: If not in contact with HCF 1 minute after departure, maintain SID heading until 10 NM east of LIH VORTAC, then intercept LIH R-110 to BOOKE DME fix.