

WAAS CH 70410 W22A	APP CRS 216°	Rwy Ldg TDZE 1166 Apt Elev 1189
--	------------------------	---

RNAV (GPS) Y RWY 22


GRANT COUNTY INTL (MWH)


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using EPH altimeter setting. Circling Rwy 9, 27, 18, 36 NA at night. When local altimeter setting not received, use EPH altimeter setting and increase LPV DA to 1402 feet; increase LNAV/VNAV DA to 1465 feet; increase all MDAs 40 feet and LNAV visibility Cats C and D ¼ SM and Circling visibility Cat D ¼ SM.

MISSED APPROACH: Climb to 4000 direct ONPIC and hold, continue climb-in-hold to 4000.

ATIS 119.05	GRANT COUNTY APP CON ★ 126.4 379.95	GRANT COUNTY TOWER ★ 118.25 (CTAF) 0 257.8 (E) 128.0 257.8 (W)	GND CON 121.9	UNICOM 122.95
-----------------------	---	--	-------------------------	-------------------------

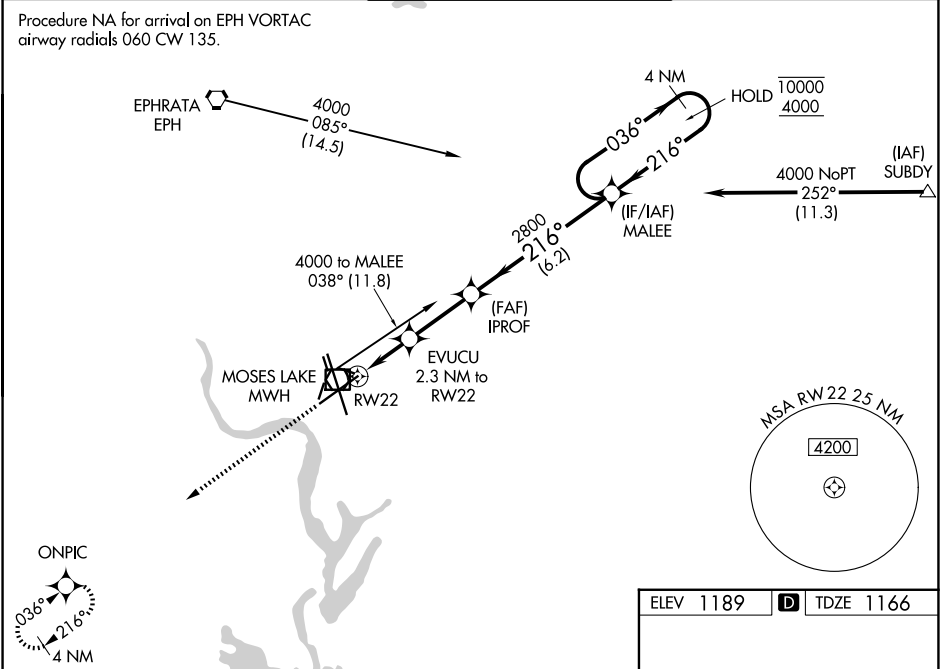

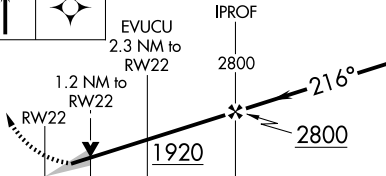4000	ONPIC	MALEE		4 NM Holding Pattern	
		EVUCU 2.3 NM to RW22	IPROF 2800	036° →	← 216°
		1.2 NM to RW22	2800	10000	4000
RW22		1920	2800	GP 3.00° TCH 50	
1.2		1.1 NM	2.7 NM	6.2 NM	
CATEGORY	A	B	C	D	
LPV DA	1366-¾		200 (200-¾)		
LNAV/VNAV DA	1429-⅞		263 (300-⅞)		
LNAV MDA	1580-1	414 (400-1)	1580-1⅛	414 (400-1⅛)	
CIRCLING	1660-1	471 (500-1)	1720-1½ 531 (600-1½)	1840-2 651 (700-2)	

