RNAV (GPS) Y RWY 34L

MAHLON SWEET FLD (EUG)

WAAS	APP CRS	Rwy Ldg	8009
CH 45600	344°	TDZE	368
W34A		Apt Elev	374


RNP APCH.

Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C or above 54°C. For inop ALS increase LNAV/VNAV visibility Cats A-B to RVR 4500. Inop table does not apply to LPV minimums.

ODALS

MISSED APPROACH: Climb to 1500, then climbing left turn to 4000 direct VAUGN and hold.

ATIS	CASCADE APP CON★	EUGENE TOWER★	GND CON	UNICOM
125.225	119.6 348.7	118.9 (CTAF) L 371.9 (16R/34L) 124.15 371.9 (16L/34R)	121.7 269.5	122.95

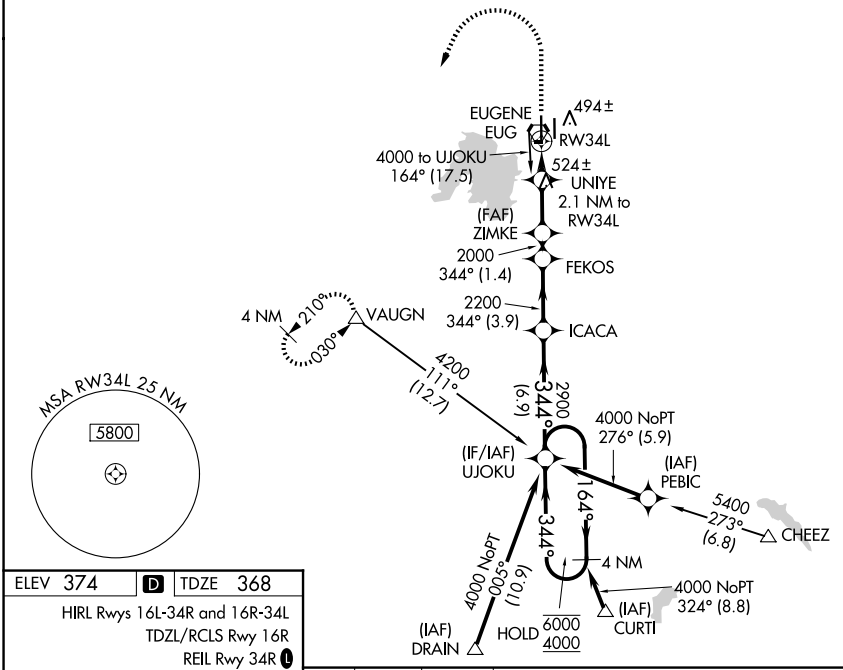



ELEV 374 D TDZE 368

HIRL Rwys 16L-34R and 16R-34L

TDZL/RCLS Rwy 16R

REIL Rwy 34R L

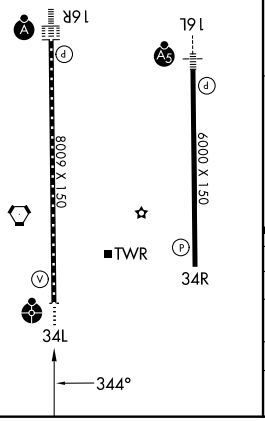

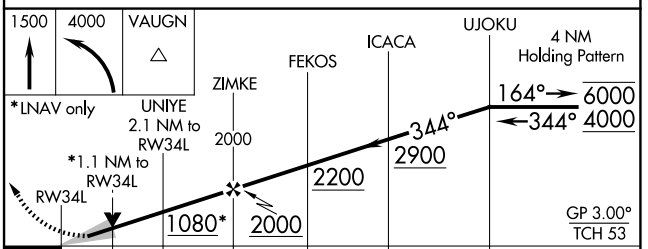

CATEGORY	A	B	C	D
LPV DA	568/40 200 (200-¾)			
LNAV/VNAV DA	657/40 289 (300-¾)			
LNAV MDA	760/40 392 (400-¾)		760/50 392 (400-1)	
CIRCLING	820-1 446 (500-1)	840-1 466 (500-1)	1000-1¾ 626 (700-1¾)	1140-2½ 766 (800-2½)

NW-1, 29 OCT 2026 to 26 NOV 2026
NW-1, 29 OCT 2026 to 26 NOV 2026